



PRODUCTS RANGE CATALOGUE

EN



The **Excellence** in Italian Machinery, by Nature.

Environment and Industry Must Coesist.



Index

COMPANY	Our History	pag.	5	SLURRY HOMOGENIZER THANK	Bifang probe system Matec	pag.	70
	Founders	pag.	7	PUMPS & VALVES	Rubber line	pag.	74
	Sector	pag.	8		Hardalloy line	pag.	75
FILTER PRESS	AQUAE	pag.	15		Horizontal centrifugal pumps	pag.	76
	IGNIS	pag.	19		Vertical pumps	pag.	"
	TERRAE	pag.	23		Submersible pumps	pag.	77
	MAGNUM	pag.	29		Clean water pumping group	pag.	"
NEW PROJECT	MEGALITH	pag.	33		Other pumps	pag.	78
	GIGATRON	pag.	38	SPECIAL PROJECT	Valves	pag.	79
	TWIN FRECCIA ROSSA	pag.	39		The CUBE	pag.	83
	TESTALTA	pag.	40		Marboline	pag.	88
ACCESSORIES	Cake Dryer	pag.	43		Kompact	pag.	90
	Cake Washing	pag.	"		Big Bag	pag.	91
	Core Blow	pag.	"	WASHING	SANDTEC	pag.	96
	Drip Tray	pag.	"		AGGRETEC	pag.	97
	Air Gasser Automatic Shaker	pag.	44		SCREENTEC	pag.	98
	Robo Wash	pag.	45		BUCTEC	pag.	99
	Cake squeezing mambrane plates	pag.	"		SCRUBTEC	pag.	100
	Tilt sensor	pag.	"		ATTRITEC	pag.	101
	TT2 Fast System	pag.	46	CRUSHING & SCREENING	MAXTEC CAT	pag.	104
	Torbidity sensor	pag.	"		MAXTEC TIGER	pag.	105
	Matec Mass Controller	pag.	"		MAXTEC LION	pag.	106
THICKENERS	Vertical deep cone	pag.	51		MAXTEC LEOPARD	pag.	107
DECANTER SILOS	Rake thickener	pag.	55		MAXTEC PUMA	pag.	108
	Paste thickener	pag.	59		MAXTER PANTHER	pag.	109
AUTOMATIC FLOCCULANT UNIT	Bifloc	pag.	64	REFERENCE		pag.	110
	Coclea	pag.	65				
	Doson System	pag.	66				

HeadQuarter



Our History

SINCE 2004



“Matec was born in Italy and quickly became a multinational with offices all over the world, thanks to its international spirit.”

Matec Industries designs and manufactures complete **crushing, screening and washing** plants for aggregates and solutions for the **purification and filtration** of waste water in many sectors, the most important of which are: **coal, iron ore, aggregates, gravel, sand, stone, concrete, ceramics and glass.** Matec's objective is complete customer satisfaction, guaranteeing a rapid after-sales service, but also a pre-sales consultancy service, in order to precisely identify the real needs of potential customers. We have installed over **4000** purification systems worldwide, **500** in the last two years: this is the real guarantee of our quality service.

Our group is one big family: machine technology **Matec** for filter presses, **Matec Steelworks** for engineering, **Matec Washing** for washing and screening plants, **Maxtec** for mobile crushing units, **Alfa Pompe** for all types of pumps (vertical, submersible, horizontal, centrifugal and others), **Matec Corporation** for all types of spare parts, **Elettromatec** for plant automation. Whatever problem you have, we can solve it.



Massimo Bertolucci



Matteo Goich

Founders

MASSIMO BERTOLUCCI - CTO

After working in the engineering department of Piaggio in Pontedera where he experienced working in an industrial excellence, he began his hands-on training in the sector of technical systems. At first, he started as a Mechanic, then he was promoted Head of Technical Assistance, and finally Technical and Design Director.

He has created and established companies over the years. Especially he takes care of each and every aspect of production and spare parts department, but he also focuses his work on the creation of just in time technical assistance services.

He has selected and trained many skilled technicians who have always been chosen for expertise. He attended training and management courses dedicated to technical areas.

Since 2003, MATEC foundation year, he has also developed skills and competences in design and engineering of turnkey systems, coordinating MATEC design center which consists of 15 engineers. He has successfully carried out projects up to 11 million euros.

Quality Obsession

"My aim is to supply technologically advanced machines with the highest quality standard. I have an obsession with quality!"

MATTEO GOICH - CEO

Has always worked as Manager and Commercial Director in various companies. He has been immediately able to identify customer's needs and compete in sales starting from basics since his first experience as a Salesman.

He has been successful in creating and developing commercial networks, entrusting products to a selected and qualified staff. He also attended Masters and training courses in sales. Increasing his professional curriculum and updating his sales techniques which represent the core of his work to meet market's latest need is his must.

He has organized and participated in international events in fields such as marble, granite, ceramics, mining, aggregates and environmental since 1997. By traveling across the world he has gained knowledge of various sectors' international markets, developing important partnerships with both collaborators and global companies.

Solutions, not Machinery

"My goal at Matec has always been to offer solutions and solve customer problems, not just to sell a machine!"

SECTOR



MINING TAILINGS & CONCENTRATE

In the mining sector, the filter press is used for the tailing and the concentrate recovering. Coal mines have to deal with the problem of disposing of the uneconomic material, by-product of the coal production. Especially, **Matec** machines can dewater the waste fines suspended in the water, recover them, clean water and eliminate tailing ponds.

Matec filter press is also used in the concentrate recovering. For this application, the cake output must have a very low residual moisture, 6 or 7%, and Matec filters can reach it through the installation of membrane plates which squeeze further and the core blow accessory to dry the cakes more. Processed rocks, coal and clay may contain a wide range of heavy materials, such as arsenic, lead, cadmium, chromium, iron, manganese, aluminum and nickel.



AGGREGATES SAND AND GRAVEL

Aggregates like gravel and in particular sand, because of their applications, need to be washed to recover fine particles and eliminate the silt which adheres to their surfaces. Usually, the water used for sand washing can be recycled by using settling ponds in which heavier particles settle down and where they are collected from the bottom to be stocked.

Recovery and storage of these materials, which must be disposed of with excavators, trucks and personnel at a later stage, have significant costs for aggregate production industry, also due to the fact that it is necessary to dedicate a large area to these operations. **Matec filter press** allows to get rid of settling ponds and produces dry cakes easy to stock and dispose of, it also recovers water which is particularly important in dry areas.



RECYCLING AND SOIL WASHING

The recycling sector is the one dedicated to the recovery of material deriving from crushing processes and soil washing. The material has to be washed to remove the polluting part, decontaminating it.

The system works with attrition cells, special tanks where the sand is agitated to eliminate contaminants through attrition, then the material is filtrated by the filter press. An important application is for the recovery of construction materials.



STONE CUTTING MARBLE AND GRANITE

In marble, granite and stone working, either in quarries or workshops or stone processing factories, water has multiple applications. From cutting to polishing, water is necessary to avoid the over-heating of tools and reduce dust produced in various processes. Then, water needs to be treated in order to be re-used in the closed production cycle or to be discharged in the environment safely.

Matec filter press is perfect to produce dry cakes with a **15% residual moisture and recover 90%** of water, occupying the minimum amount of space.



CONCRETE AND TUNNELING

The water used for the washing of trucks and mixers must be treated in order to be recovered and cement remains must be disposed of or recovered at the end of the working cycle.

Matec offers two options in their plants for the clarification of water deriving from pump and cement mixer washing in concrete and cement plants. Before the filtration and purification process is carried out by the filter press, the residue can be processed by a screw separator or a dewatering screen in order to separate and select aggregates.



GLASS CERAMIC

In the glass workshops, the water must be treated to remove the residue deriving from glass working.

Whereas in the ceramic sector, the filter press can be used for the disposal of the slurry deriving from ceramic working or for the preparation of the ceramic pulp for the ceramic production process.




CHEMICAL PLASTIC, INDUSTRIAL APPLICATION

Matec machines and plants can be applied to other sectors. Wherever there is slurry to be treated Matec is the best solution on the market.

OVER **4000 INSTALLATIONS**
IN **80 COUNTRIES**

From the small **craftsman**, to big **industry**.

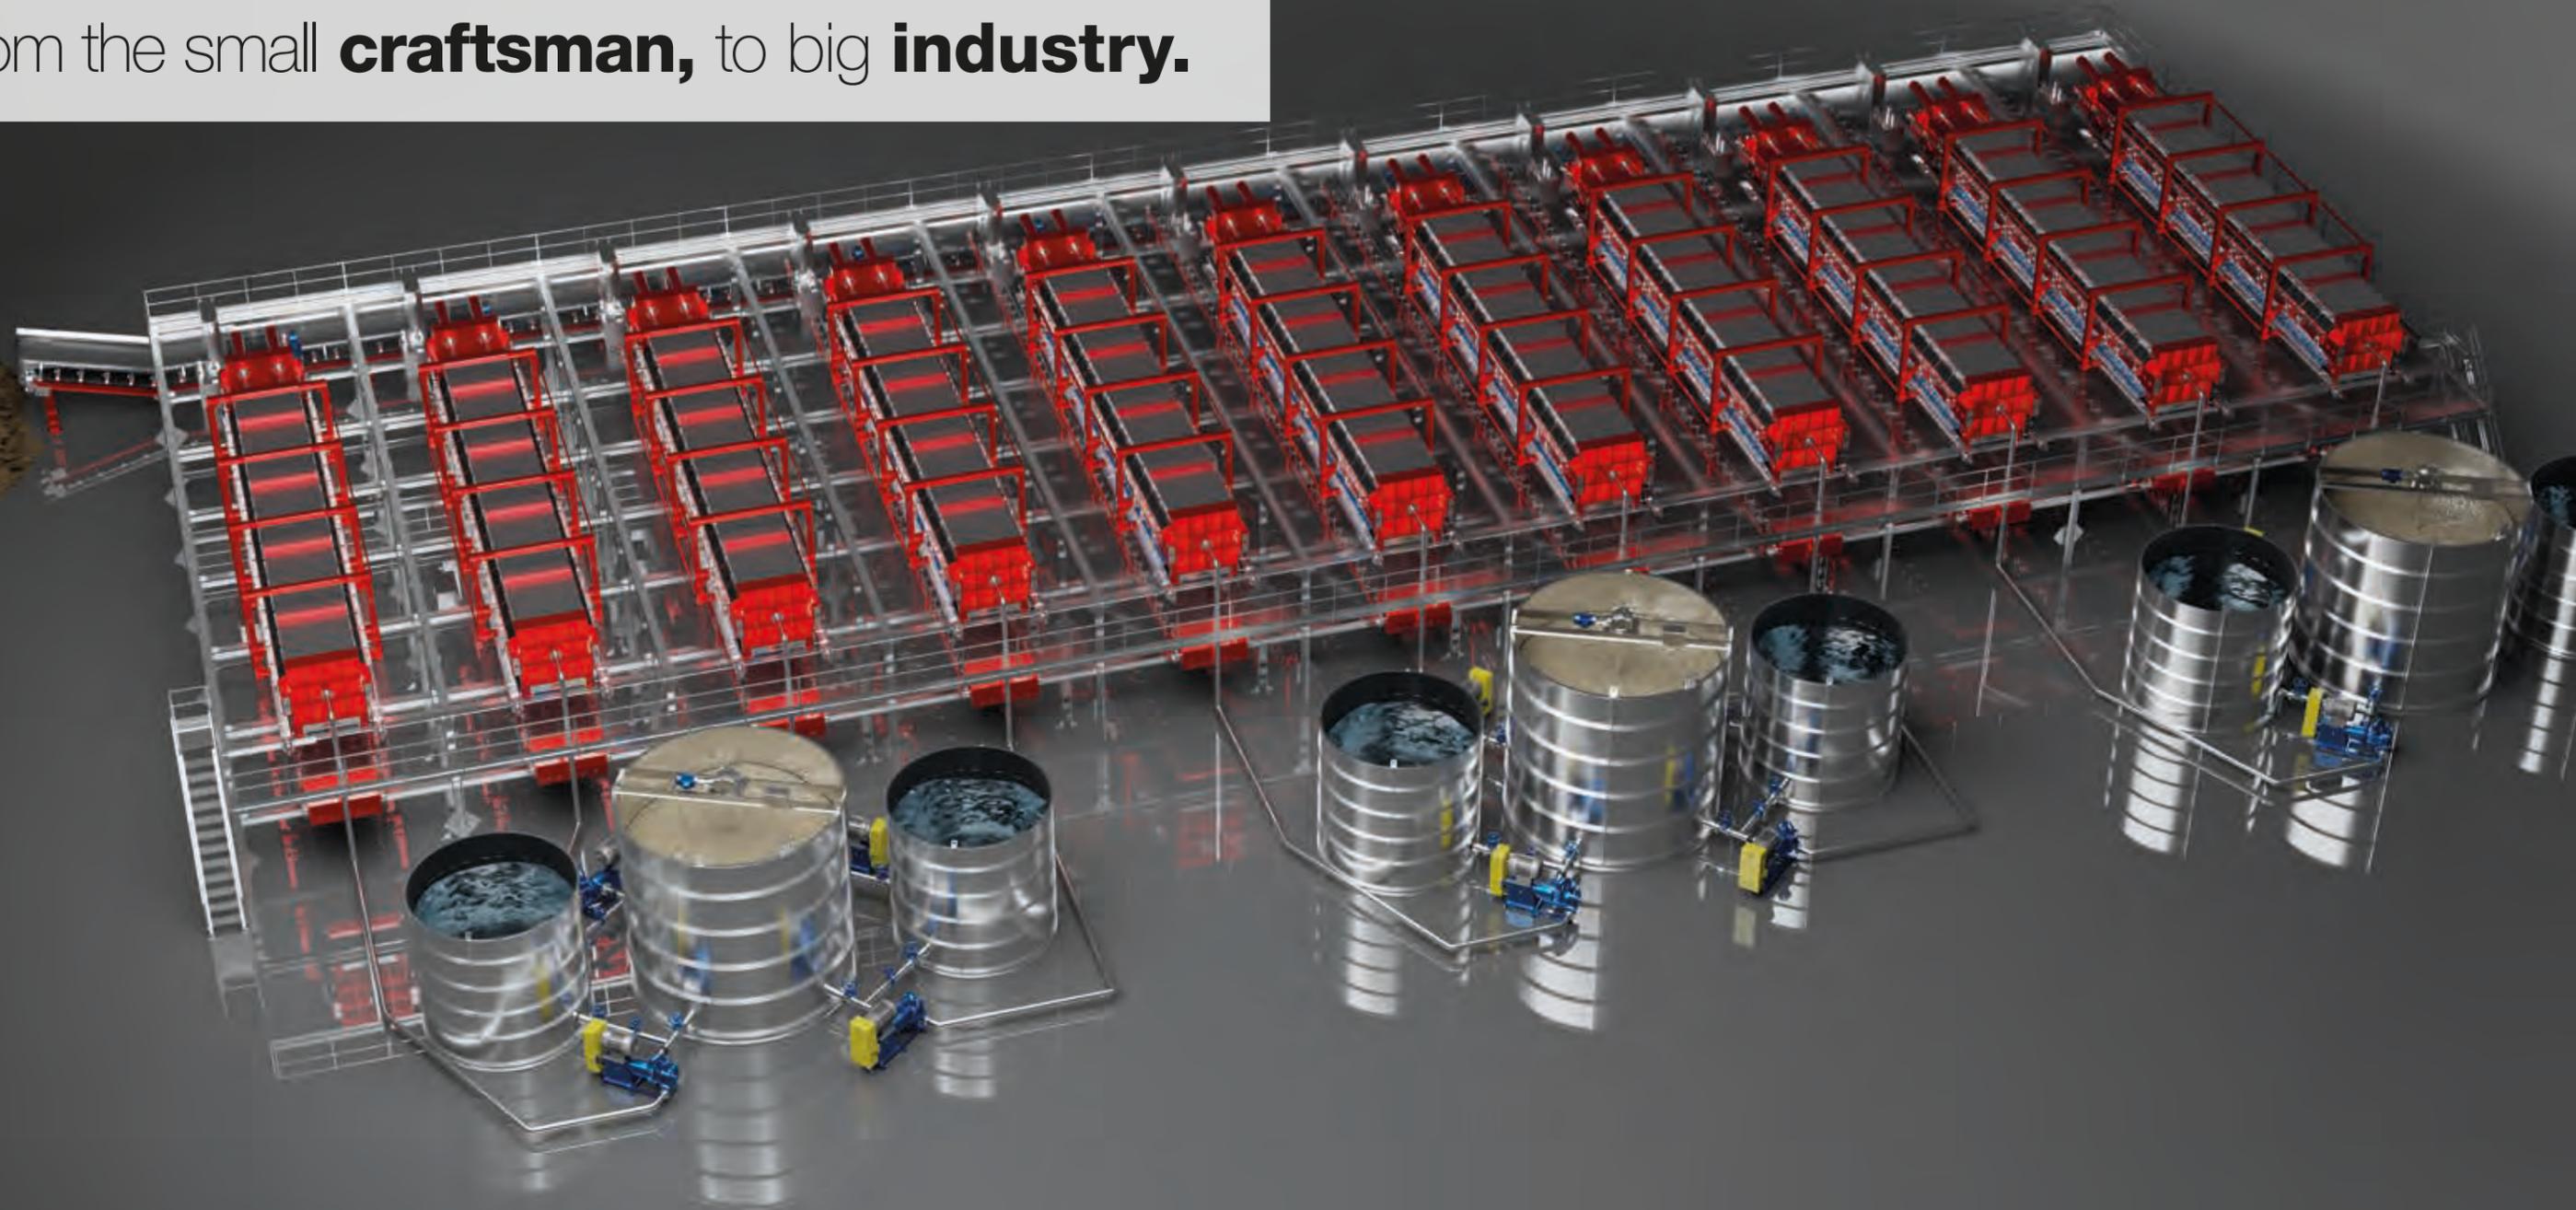

High-tech **filter presses**



AQUAE
IGNIS
TERRAE
MAGNUM
MEGALITH
Accessories

pag. 17
pag. 21
pag. 25
pag. 31
pag. 35
pag. 41

Why
choose Matec,






HPT - 16/21/30 BAR HIGH PRESSURE TECHNOLOGY

Matec filter presses have been created for the aggregates sector where **HPT** is essential for obtaining excellent results with difficult muds, while our competitors come from sectors such as food, marble, and chemicals. **HPT** is more expensive, it needs **MORE QUALITY** and **better components**:

- **BIGGER PISTON BORE**
- **BIGGER OLEODYNAMIC POWER UNIT**
- **MORE IRON FOR THE FRAME STRUCTURE**

MATEC FILTER PRESS WORKS AT: 16-30 BAR (230-435 PSI)

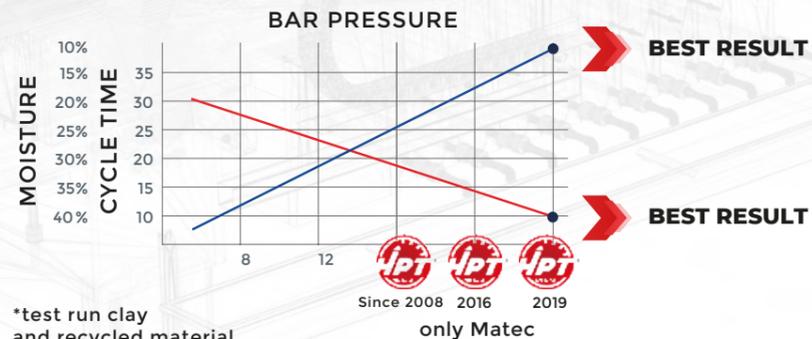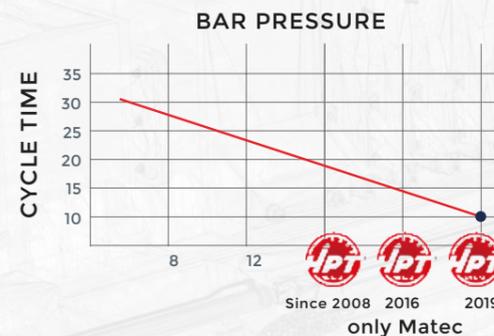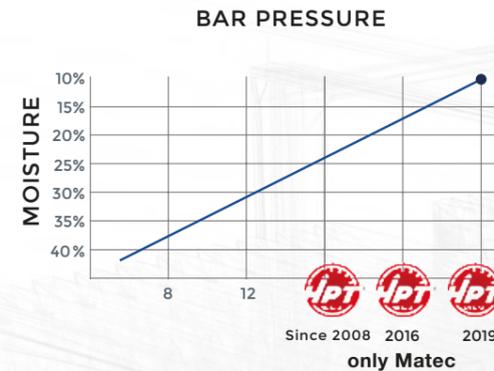

*test run clay and recycled material

MORE PRESSURE



MORE RESULTS



**LESS WATER
IN THE CAKE
SHORTEST CYCLES**

Smartness and innovation.



AQUAE®

FILTER PRESS




Perfect for small and medium production plants specialized in **aggregates, sand** and **gravel treatment** in **quarries** and **mines**.

Aquae 400x400, 500x500 e 630x630.

It is named after the Latin word for **Water**, because it was created as a project designed for the recovery of water even in case of minimum flow rates.

BECAUSE WATER IS LIFE!

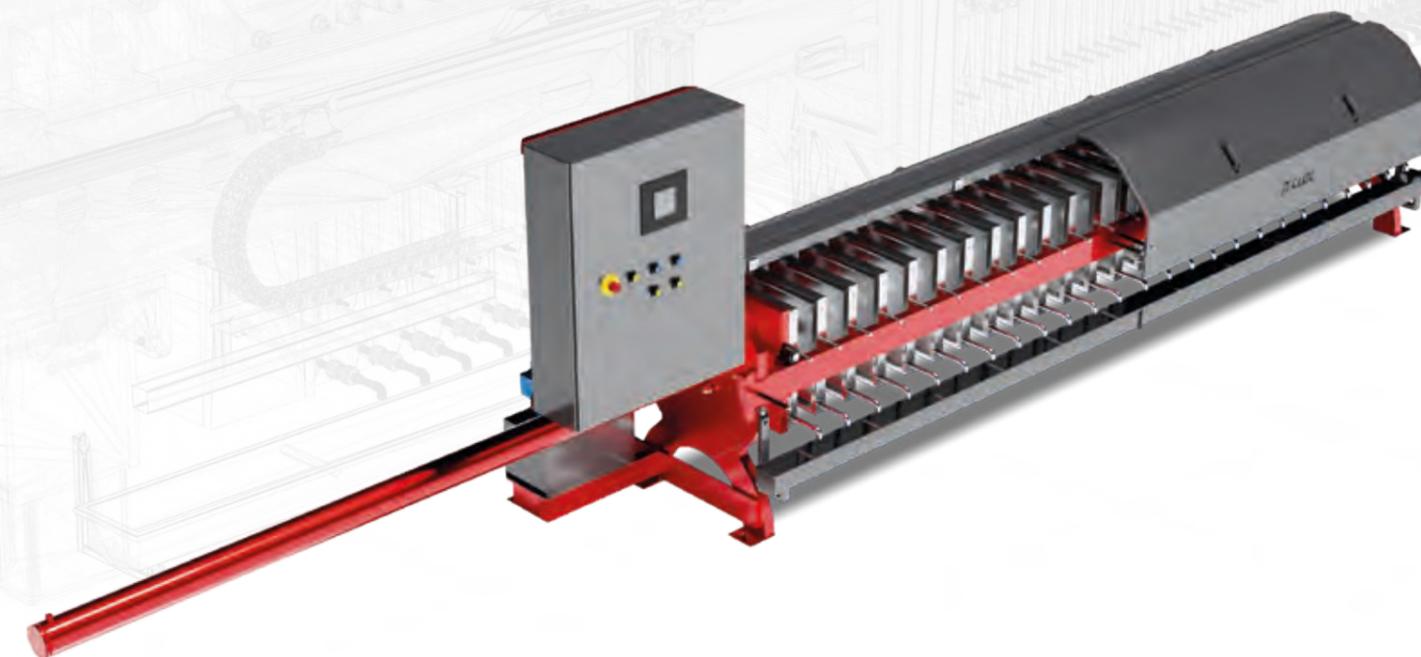

AQUAE

FILTER PRESS

STANDARD COLOR



RAL 3002

OPTIONAL



RAL 7024



CLIENT COSTUMER RAL

ACQUAE 400x400



Gs

Gasser Shaker


ACQUAE 500x500



Gs

Gasser Shaker

ACQUAE 630x630

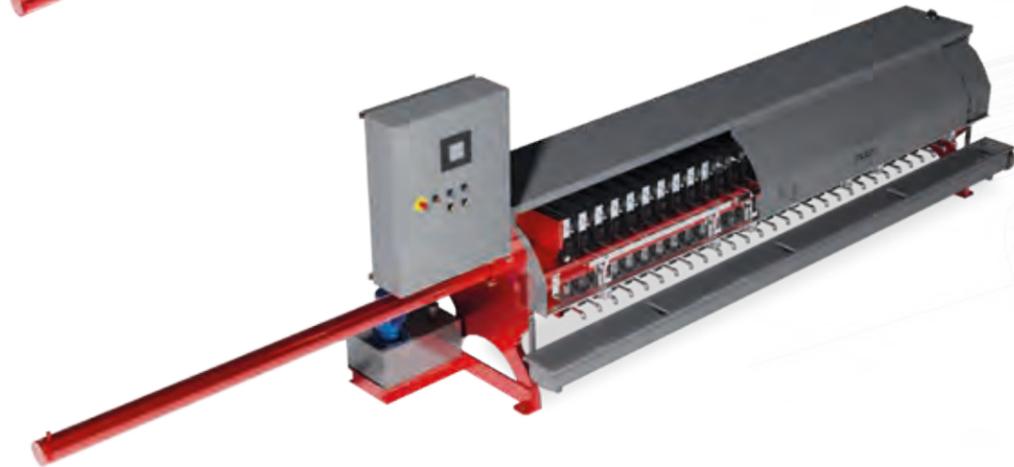

Gs

Gasser Shaker

ACQUAE OPTIONAL



Cake Dryer



Cake Washing



Core Blow



Drip Tray



Real Washing



Robo Wash



Squeezing Membrane Plates



Tilt Sensor



Turbidity Sensor

Aquae model 400x400	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m³/h (2 cycles)	Ton/h	m³/h (3 cycles)	Ton/h
400/3	1290	770	510	430	800	350	4,2	12,60	0,03	0,05	0,04	0,07
400/5	1620	770	740	430	800	350	4,2	21,00	0,04	0,08	0,06	0,12
400/10	2560	770	1320	430	800	450	4,2	42,00	0,08	0,16	0,13	0,23
400/15	3510	770	1930	430	800	500	4,2	63,00	0,13	0,23	0,19	0,35
400/20	4400	770	2520	430	800	600	4,2	84,00	0,17	0,31	0,25	0,47

Aquae model 500x500	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m³/h (2 cycles)	Ton/h	m³/h (3 cycles)	Ton/h
500/10	2560	770	1320	430	800	800	5,9	59,00	0,12	0,22	0,18	0,33
500/15	3510	770	1930	430	800	1000	5,9	89,00	0,18	0,33	0,27	0,49
500/20	4400	770	2520	430	800	1200	5,9	118,00	0,24	0,44	0,35	0,65
500/25	5520	770	3080	430	800	1300	5,9	148,00	0,30	0,55	0,44	0,82
500/30	6150	770	3670	430	800	1450	5,9	177,00	0,35	0,65	0,53	0,98

Aquae model 630x630	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m³/h (2 cycles)	Ton/h	m³/h (3 cycles)	Ton/h
630/10	2880	1200	1545	770	1565	2600	10,8	108,00	0,22	0,40	0,32	0,60
630/15	5290	1200	2885	770	1565	3000	10,8	162,00	0,32	0,60	0,49	0,90
630/20	5690	1200	2885	770	1565	3500	10,8	216,00	0,43	0,80	0,65	1,20
630/25	6175	1200	3555	770	1565	3800	10,8	270,00	0,54	1,00	0,81	1,50
630/30	7300	1200	4255	770	1565	4000	10,8	324,00	0,65	1,20	0,97	1,80

Technology and evolution.




IGNIS[®]
FILTER PRESS



Perfect for medium production plants specialized in **aggregates, sand and gravel treatment** in **quarries and mines**.

Ignis 800x800 and 1000x1000.

It is named after the Latin word for **Fire**, because it is created from materials **welded with fire**.

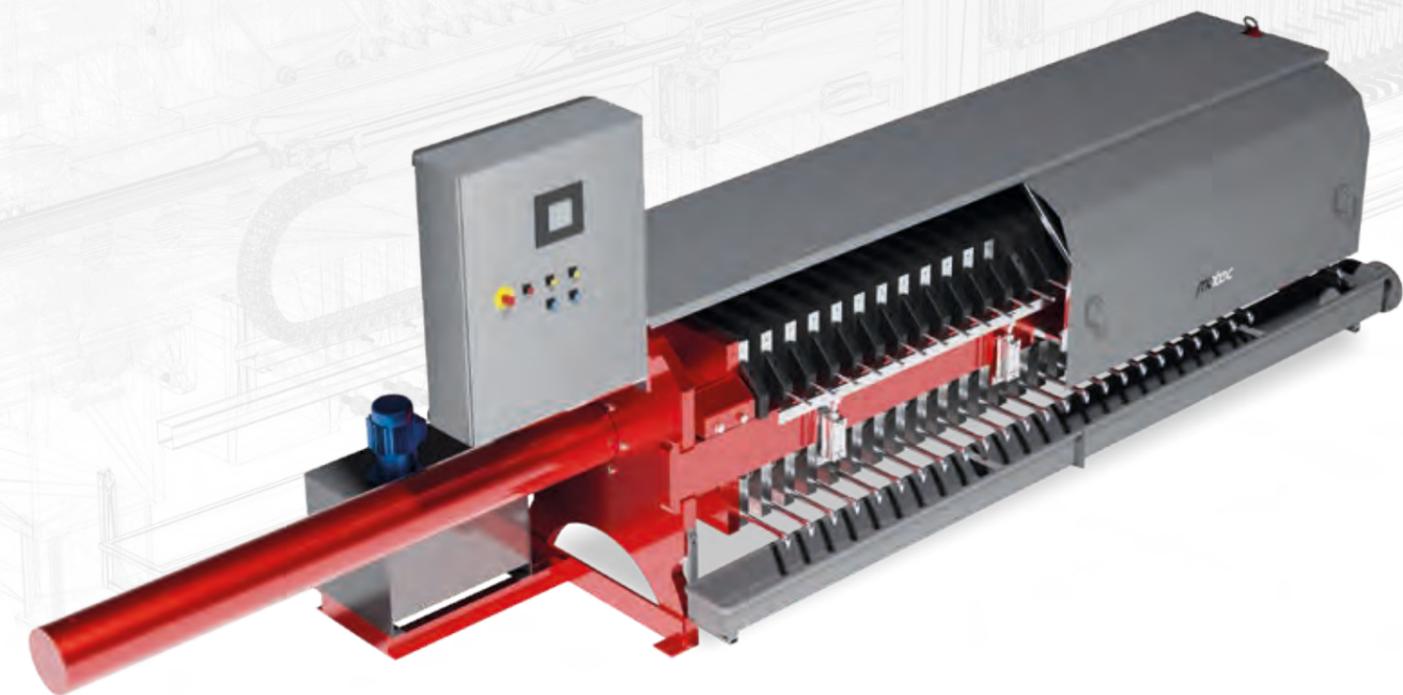

IGNIS FILTER PRESS



STANDARD COLOR



RAL 3002

OPTIONAL




RAL 7024




CLIENT
COSTUMER RAL

IGNIS
800x800

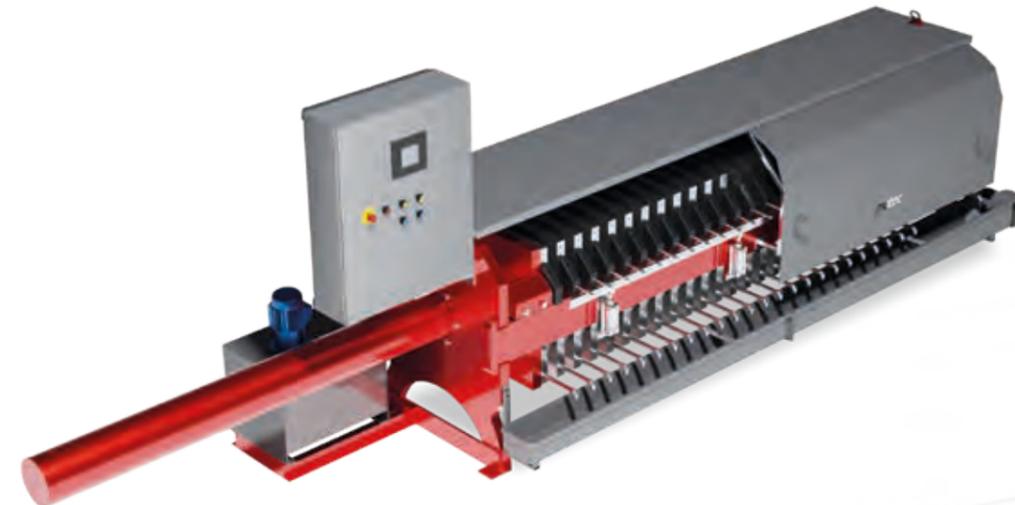

IGNIS
1000x1000

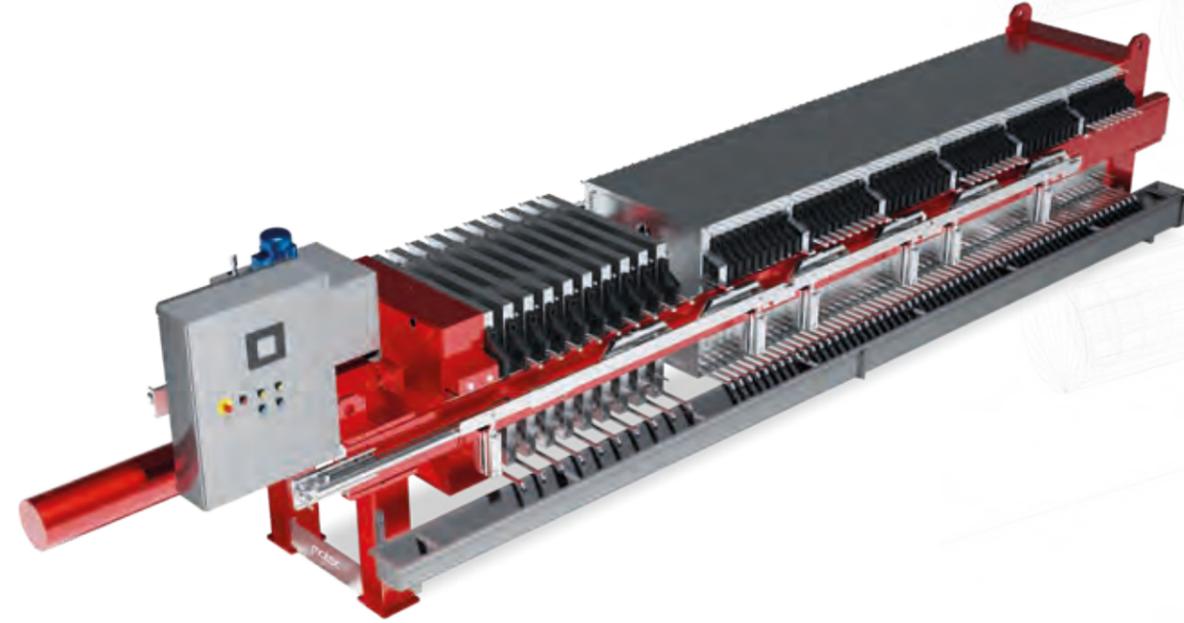

IGNIS OPTIONAL



800/10 - 800/40



Gasser
Shaker

800/50 +



Gasser
Shaker



TT2
Fast

1000/15 - 1000/40



Gasser
Shaker

1000/50 +



Gasser
Shaker



TT2
Fast

1000/100 +



Gasser
Shaker



TT2
Fast



Core
Blow



Tilt
Sensor

Ignis model 800x800	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
800/10	4235	1530	2455	890	1760	2600	18,2	182,00	0,36	0,67	0,55	1,01
800/15	4585	1530	2455	890	1760	3300	18,2	273,00	0,55	1,01	0,82	1,52
800/20	5300	1530	3160	890	1760	3600	18,2	364,00	0,73	1,35	1,09	2,02
800/25	7900	1530	4575	890	1760	4500	18,2	455,00	0,91	1,68	1,37	2,53
800/30	7900	1530	4575	890	1760	4500	18,2	546,00	1,09	2,02	1,64	3,03
800/40	8120	1530	5980	890	1760	5500	18,2	728,00	1,46	2,69	2,18	4,04
800/50 TT2 Fast	5780	1530	4520	890	1760	6000	18,2	910,00	1,82	3,37	2,73	5,05
800/60 TT2 Fast	6400	1530	5140	890	1760	6600	18,2	1092,00	2,18	4,04	3,28	6,06

Ignis model 1000x1000	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
1000/15	6160	1840	3665	870	2135	4000	29,1	437,00	0,87	1,62	1,31	2,42
1000/20	6760	1840	3665	870	2135	4500	29,1	582,00	1,16	2,15	1,75	V3,23
1000/25	8305	1840	5065	870	2135	5000	29,1	728,00	1,46	2,69	2,18	4,04
1000/30	8705	1840	5065	870	2135	5500	29,1	873,00	1,75	3,23	2,62	4,85
1000/40	10115	1840	6515	870	2135	6500	29,1	1164,00	2,33	4,31	3,49	6,46
1000/50 TT2 Fast	7600	1840	5450	870	2155	7000	29,1	1455,00	2,91	5,38	4,37	8,08
1000/60TT2 Fast	8080	1840	5940	870	2155	7500	29,1	1746,00	3,49	6,46	5,24	9,69
1000/70 TT2 Fast	9080	1840	6940	870	2155	8100	29,1	2037,00	4,07	7,54	6,11	11,31
1000/80 TT2 Fast	9480	1840	7700	870	2155	8700	29,1	2328,00	4,66	8,61	6,98	12,92
1000/90 TT2 Fast	9845	1840	7340	870	2155	9300	29,1	2619,00	5,24	9,69	7,86	14,54
1000/100TT2 Fast	11355	1840	9215	870	2155	11000	29,1	2910,00	5,82	10,77	8,73	16,15
1000/120TT2 Fast	12400	1840	10900	870	2155	12500	29,1	3492,00	6,98	12,92	10,48	19,38
1000/140 TT2 Fast	13825	1840	11875	870	2155	14500	29,1	4074,00	8,15	15,07	12,22	22,61

Performance and reliability.




TERRAE®

FILTER PRESS



Perfect for medium and large production plants specialized in **aggregates, sand and gravel treatment** in **quarries and mines**.

Terrae 1200x1200, 1300x1300, 1500x1500 and 1500x2000. It is named after the Latin word for **Earth**, because it is specially created for and completely dedicated to every kinds of applications in **quarries and mines**, that is to say for areas where men use the Earth for progress.

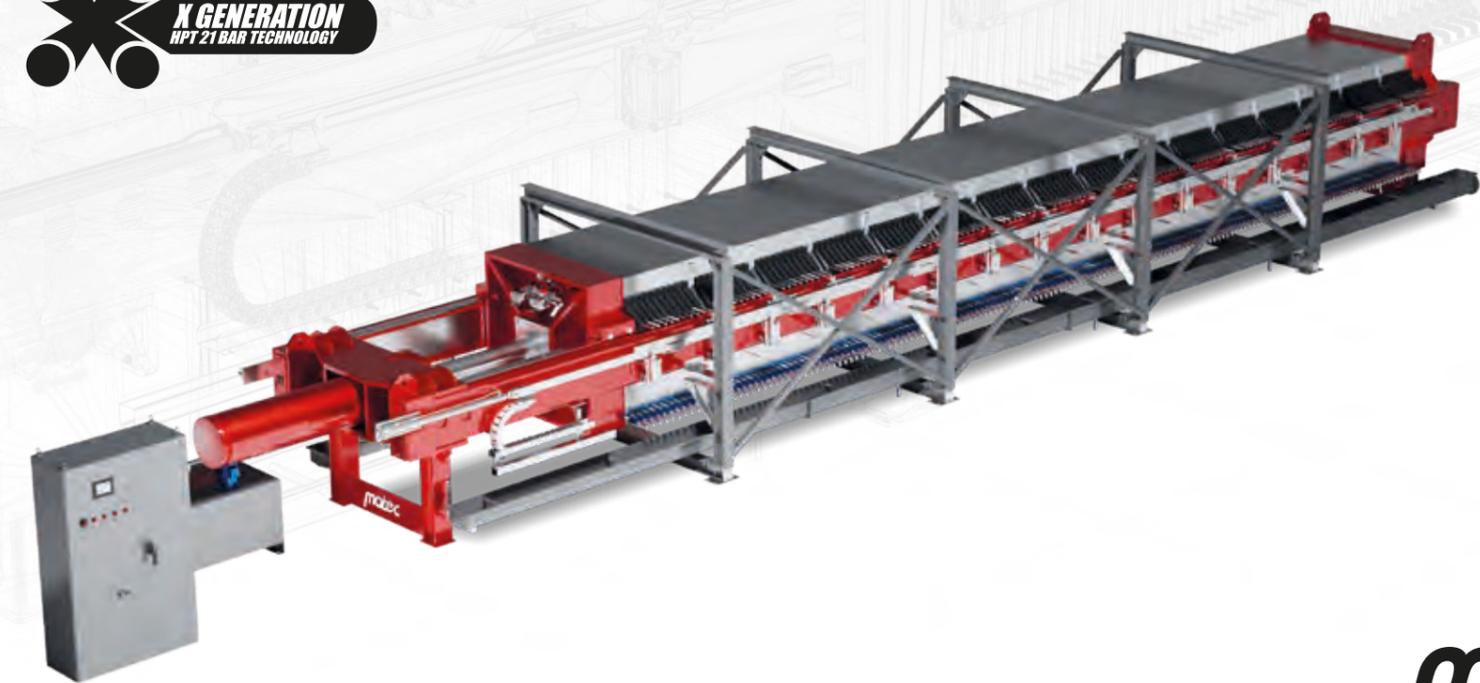

TERRAE

FILTER PRESS



COLOR STANDARD



RAL 3002

OPTIONAL




RAL 7024




CLIENT COSTUMER RAL

TERRAE 1200x1200

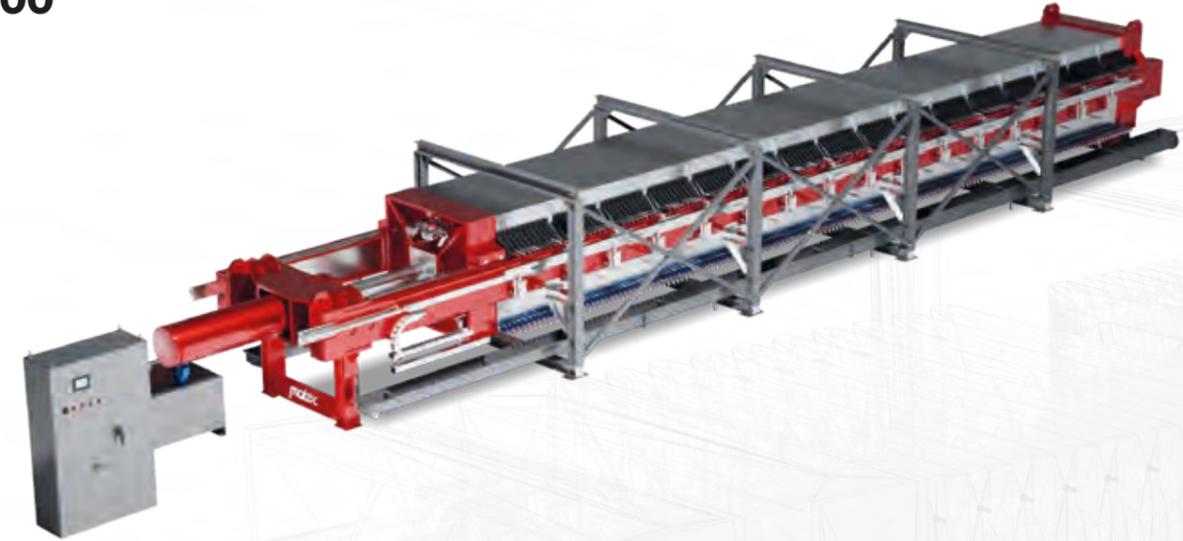

TERRAE 1300x1300

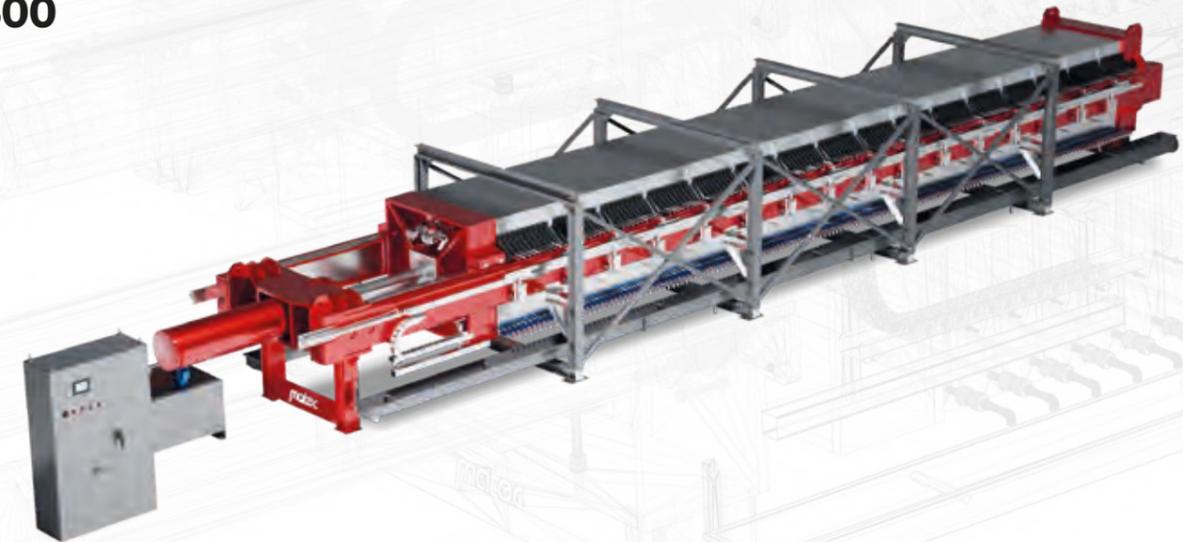

TERRAE OPTIONAL



1200/15 - 1200/40



Gasser Shaker

1200/50 +



Gasser Shaker



TT2 Fast

1200/100 +



Gasser Shaker



TT2 Fast



Core Blow



Tilt Sensor

Terrae model 1200x1200	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
1200/15	5388	2270	3485	1170	2060	5700	39,8	597	1,19	2,21	1,79	3,31
1200/20	5580	2270	3475	1170	2060	8100	39,8	796	1,59	2,95	2,39	4,42
1200/25	7410	2270	4955	1170	2060	9500	39,8	995	1,99	3,68	2,99	5,52
1200/30	9850	2270	6995	1170	2060	10900	39,8	1194	2,39	4,42	3,58	6,63
1200/40	11680	2270	8425	1170	2060	12000	39,8	1592	3,18	5,89	4,78	8,84
1200/50 TT2 Fast	8173	2270	6050	1170	2060	12400	39,8	1990	3,98	7,36	5,97	11,04
1200/60 TT2 Fast	9363	2270	7120	1170	2060	13500	39,8	2388	4,78	8,84	7,16	13,25
1200/70 TT2 Fast	9850	2270	7312	1170	2060	14600	39,8	2786	5,57	10,31	8,36	15,46
1200/80 TT2 Fast	10469	2270	8344	1170	2060	15500	39,8	3184	6,37	11,78	9,55	17,67
1200/100 TT2 Fast	11863	2270	9740	1170	2060	16800	39,8	3861	7,72	13,46	11,58	20,19
1200/120 TT2 Fast	12723	2270	10600	1170	2060	18400	39,8	4641	9,28	17,36	13,92	26,04
1200/140 TT2 Fast	14710	2270	12710	1170	2060	20400	39,8	5461	10,84	20,48	16,26	30,72
1200/150 TT2 Fast	15460	2270	13460	1170	2060	22400	39,8	5811	11,62	21,94	17,43	32,91
1200/160 TT2 Fast	16220	2270	14220	1170	2060	24400	39,8	6201	12,40	23,40	18,60	35,10

1300/15 - 1300/40



Gasser Shaker

1300/50 +



Gasser Shaker



TT2 Fast

1300/100 +



Gasser Shaker



TT2 Fast



Core Blow



Tilt Sensor

Terrae model 1300x1300	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
1300/15	5388	2270	3465	1170	2060	6000	47,3	710	1,42	2,63	2,13	3,94
1300/20	5580	2270	3475	1170	2060	8500	47,3	946	1,89	3,50	2,84	5,25
1300/25	7410	2270	4955	1170	2060	10000	47,3	1183	2,37	4,38	3,55	6,56
1300/30	9850	2270	6995	1170	2060	11500	47,3	1419	2,84	5,25	4,26	7,88
1300/40	11680	2270	8425	1170	2060	13000	47,3	1892	3,78	7,00	5,68	10,50
1300/50 TT2 Fast	8173	2270	6050	1170	2060	13200	47,3	2365	4,73	8,75	7,10	13,13
1300/60 TT2 Fast	9363	2270	7120	1170	2060	14500	47,3	2838	5,68	10,50	8,51	15,75
1300/70 TT2 Fast	9850	2270	7312	1170	2060	15800	47,3	3311	6,62	12,25	9,93	18,38
1300/80 TT2 Fast	10469	2270	8344	1170	2060	17100	47,3	3784	7,57	14,00	11,35	21,00
1300/90 TT2 Fast	10700	2270	8575	1170	2060	18400	47,3	4257	8,51	15,75	12,77	23,63
1300/100 TT2 Fast	11863	2270	9740	1170	2060	20000	47,3	4730	9,46	17,50	14,19	26,25
1300/120 TT2 Fast	12723	2270	10600	1170	2060	22000	47,3	5676	11,35	21,00	17,03	31,50
1300/140 TT2 Fast	14710	2270	12710	1170	2060	24000	47,3	6622	13,24	24,50	19,87	36,75
1300/150 TT2 Fast	15460	2270	13460	1170	2060	26000	47,3	7095	14,19	26,25	21,29	39,38
1300/160 TT2 Fast	16220	2270	14220	1170	2060	27250	47,3	7568	15,14	28,00	22,70	42,00

TERRAE

FILTER PRESS



STANDARD COLOR


 RAL 3002

OPTIONAL


 RAL 7024

 CLIENT COSTUMER RAL

TERRAE 1500x1500

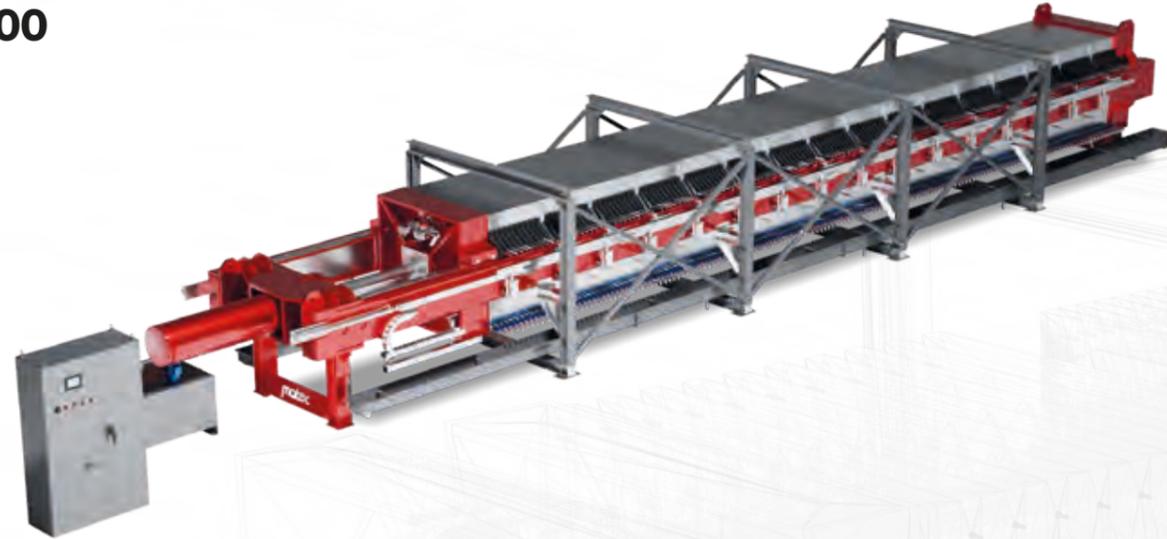

TERRAE 1500x2000

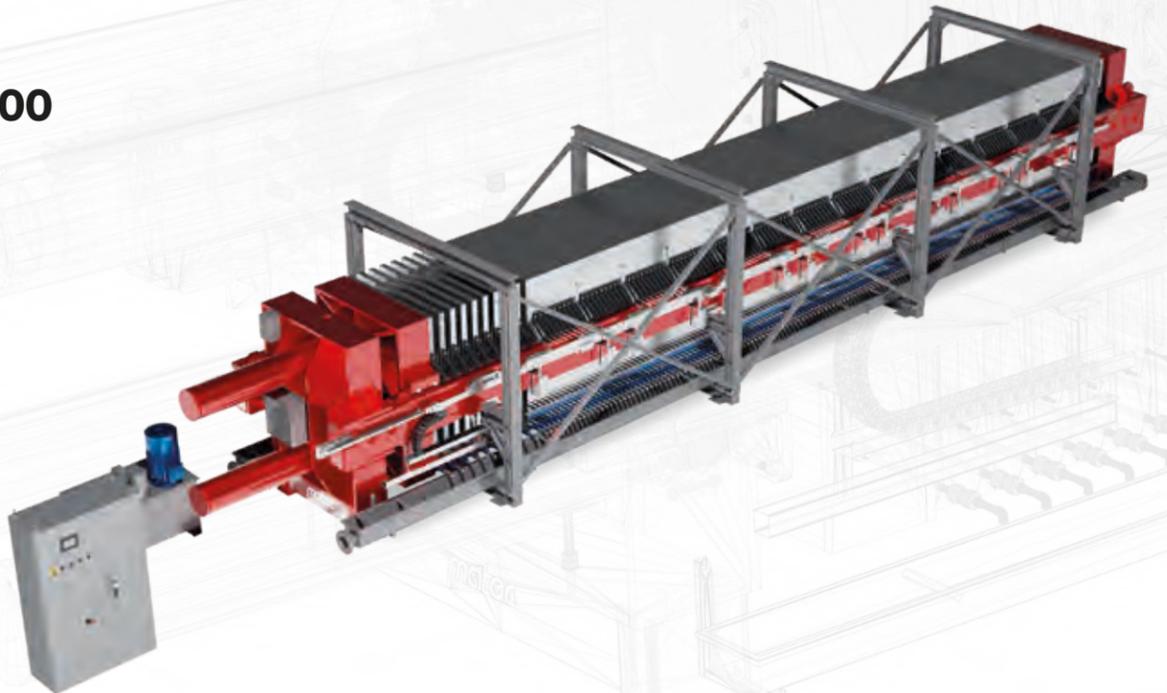

TERRAE OPTIONAL



1500x1500/50 +



Terrae model 1500x1500	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
1500/50 TT2 Fast	8540	2505	6360	1360	2270	15800	63,1	3155	6,31	11,67	9,47	17,51
1500/60 TT2 Fast	9300	2505	6840	1360	2270	17800	63,1	3786	7,57	14,01	11,36	21,01
1500/70 TT2 Fast	10200	2505	8020	1360	2270	19800	63,1	4417	8,83	16,34	13,25	24,51
1500/80 TT2 Fast	11020	2505	8840	1360	2410	21500	63,1	5048	10,10	18,68	15,14	28,02
1500/90 TT2 Fast	11680	2505	9265	1360	2410	24000	63,1	5679	11,36	21,01	17,04	31,52
1500/100 TT2 Fast	12635	2505	10415	1360	2410	25000	63,1	6310	12,62	23,35	18,93	35,02
1500/120 TT2 Fast	13850	2505	10415	1360	2410	27000	63,1	7572	15,14	28,02	22,72	42,02
1500/140 TT2 Fast	15825	2505	14100	1360	2410	29000	63,1	8834	17,67	32,69	26,50	49,03
1500/150 TT2 Fast	16840	2505	14660	1360	2410	30000	63,1	9465	18,93	35,02	28,40	52,53
1500/160 TT2 Fast	17670	2505	15490	1360	2410	32000	63,1	10096	20,19	37,36	30,29	56,03
1500/170 TT2 Fast	18295	2505	16285	1360	2410	33000	63,1	10727	21,45	39,69	32,18	59,53
1500/180 TT2 Fast	19125	2505	17150	1360	2410	34000	63,1	11358	22,72	42,02	34,07	63,04
1500/190 TT2 Fast	19955	2505	17980	1360	2410	35000	63,1	11989	23,98	44,36	35,97	66,54
1500/200 TT2 Fast	20935	2505	18960	1360	2410	36000	63,1	12620	25,24	46,69	37,86	70,04

1500x2000/50 +



Terrae model 1500x2000	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
1500/50 TT2 Fast	9650	2550	6385	1310	2445	22200	84,7	4235	8,47	15,67	12,71	23,50
1500/60 TT2 Fast	10490	2550	7260	1310	2445	23900	84,7	5082	10,16	18,80	15,25	28,21
1500/70 TT2 Fast	11330	2550	8100	1310	2445	25600	84,7	5929	11,86	21,94	17,79	32,91
1500/80 TT2 Fast	12170	2550	8940	1310	2960	27300	84,7	6776	13,55	25,07	20,33	37,61
1500/90 TT2 Fast	13010	2550	9780	1310	2960	29200	84,7	7623	15,25	28,21	22,87	42,31
1500/100 TT2 Fast	13850	2550	10620	1310	2960	31200	84,7	8470	16,94	31,34	25,41	47,01
1500/120 TT2 Fast	15530	2550	12300	1310	2960	33100	84,7	10164	20,33	37,61	30,49	56,41
1500/140 TT2 Fast	17210	2550	13980	1310	2960	35200	84,7	11858	23,72	43,87	35,57	65,81
1500/150 TT2 Fast	18050	2550	14820	1310	2960	36350	84,7	12705	25,41	47,01	38,12	70,51
1500/160 TT2 Fast	18890	2550	15660	1310	2960	37500	84,7	13552	27,10	50,14	40,66	75,21
1500/170 TT2 Fast	19730	2550	16500	1310	2960	38650	84,7	14399	28,80	53,28	43,20	79,91
1500/180 TT2 Fast	20570	2550	17340	1310	2960	39800	84,7	15246	30,49	56,41	45,74	84,62
1500/190 TT2 Fast	21410	2550	18180	1310	2960	41300	84,7	16093	32,19	59,54	48,28	89,32
1500/200 TT2 Fast	22250	2550	19020	1310	2960	42800	84,7	16940	33,88	62,68	50,82	94,02

Sturdy and performing.



MAGNUM[®]


FILTER PRESS



Perfect for very large plants specialized in **aggregates, earth and gravel treatment** in **quarries and mines**.

Magnum 2000x2000. It is named after the Latin word for **Magnificent**, because it is our **top-of-the-range**.

Machine, created for and **completely dedicated** to every kinds of applications in quarries and mines, that is to say for areas where men use the Earth for progress.

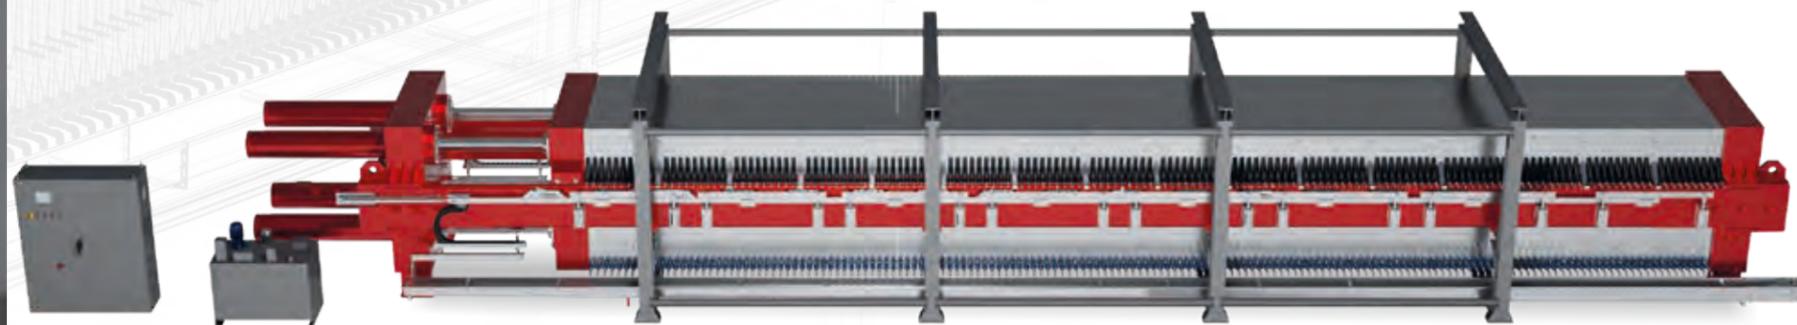

MAGNUM

FILTER PRESS

MAGNUM
2000x2000



STANDARD COLOR

 RAL 3002

OPTIONAL

 RAL 7024


 CLIENT
COSTUMER RAL

MAGNUM OPTIONAL



Magnum 2000x2000	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
2000/100 TT2 Fast	14210	3430	12070	1356	3795	41960	115	11500	23,00	42,55	34,50	63,83
2000/120 TT2 Fast	16060	3430	13920	1356	3795	43360	115	13800	27,60	51,06	41,40	76,59
2000/140 TT2 Fast	17910	3430	15770	1356	3795	45760	115	16100	32,20	59,57	48,30	89,36
2000/160 TT2 Fast	18810	3430	16670	1356	3795	48750	115	18400	36,80	68,08	55,20	102,12
2000/180 TT2 Fast	21610	3430	19470	1356	3795	51740	115	20700	41,40	76,59	62,10	114,89

Heavy duty designed.

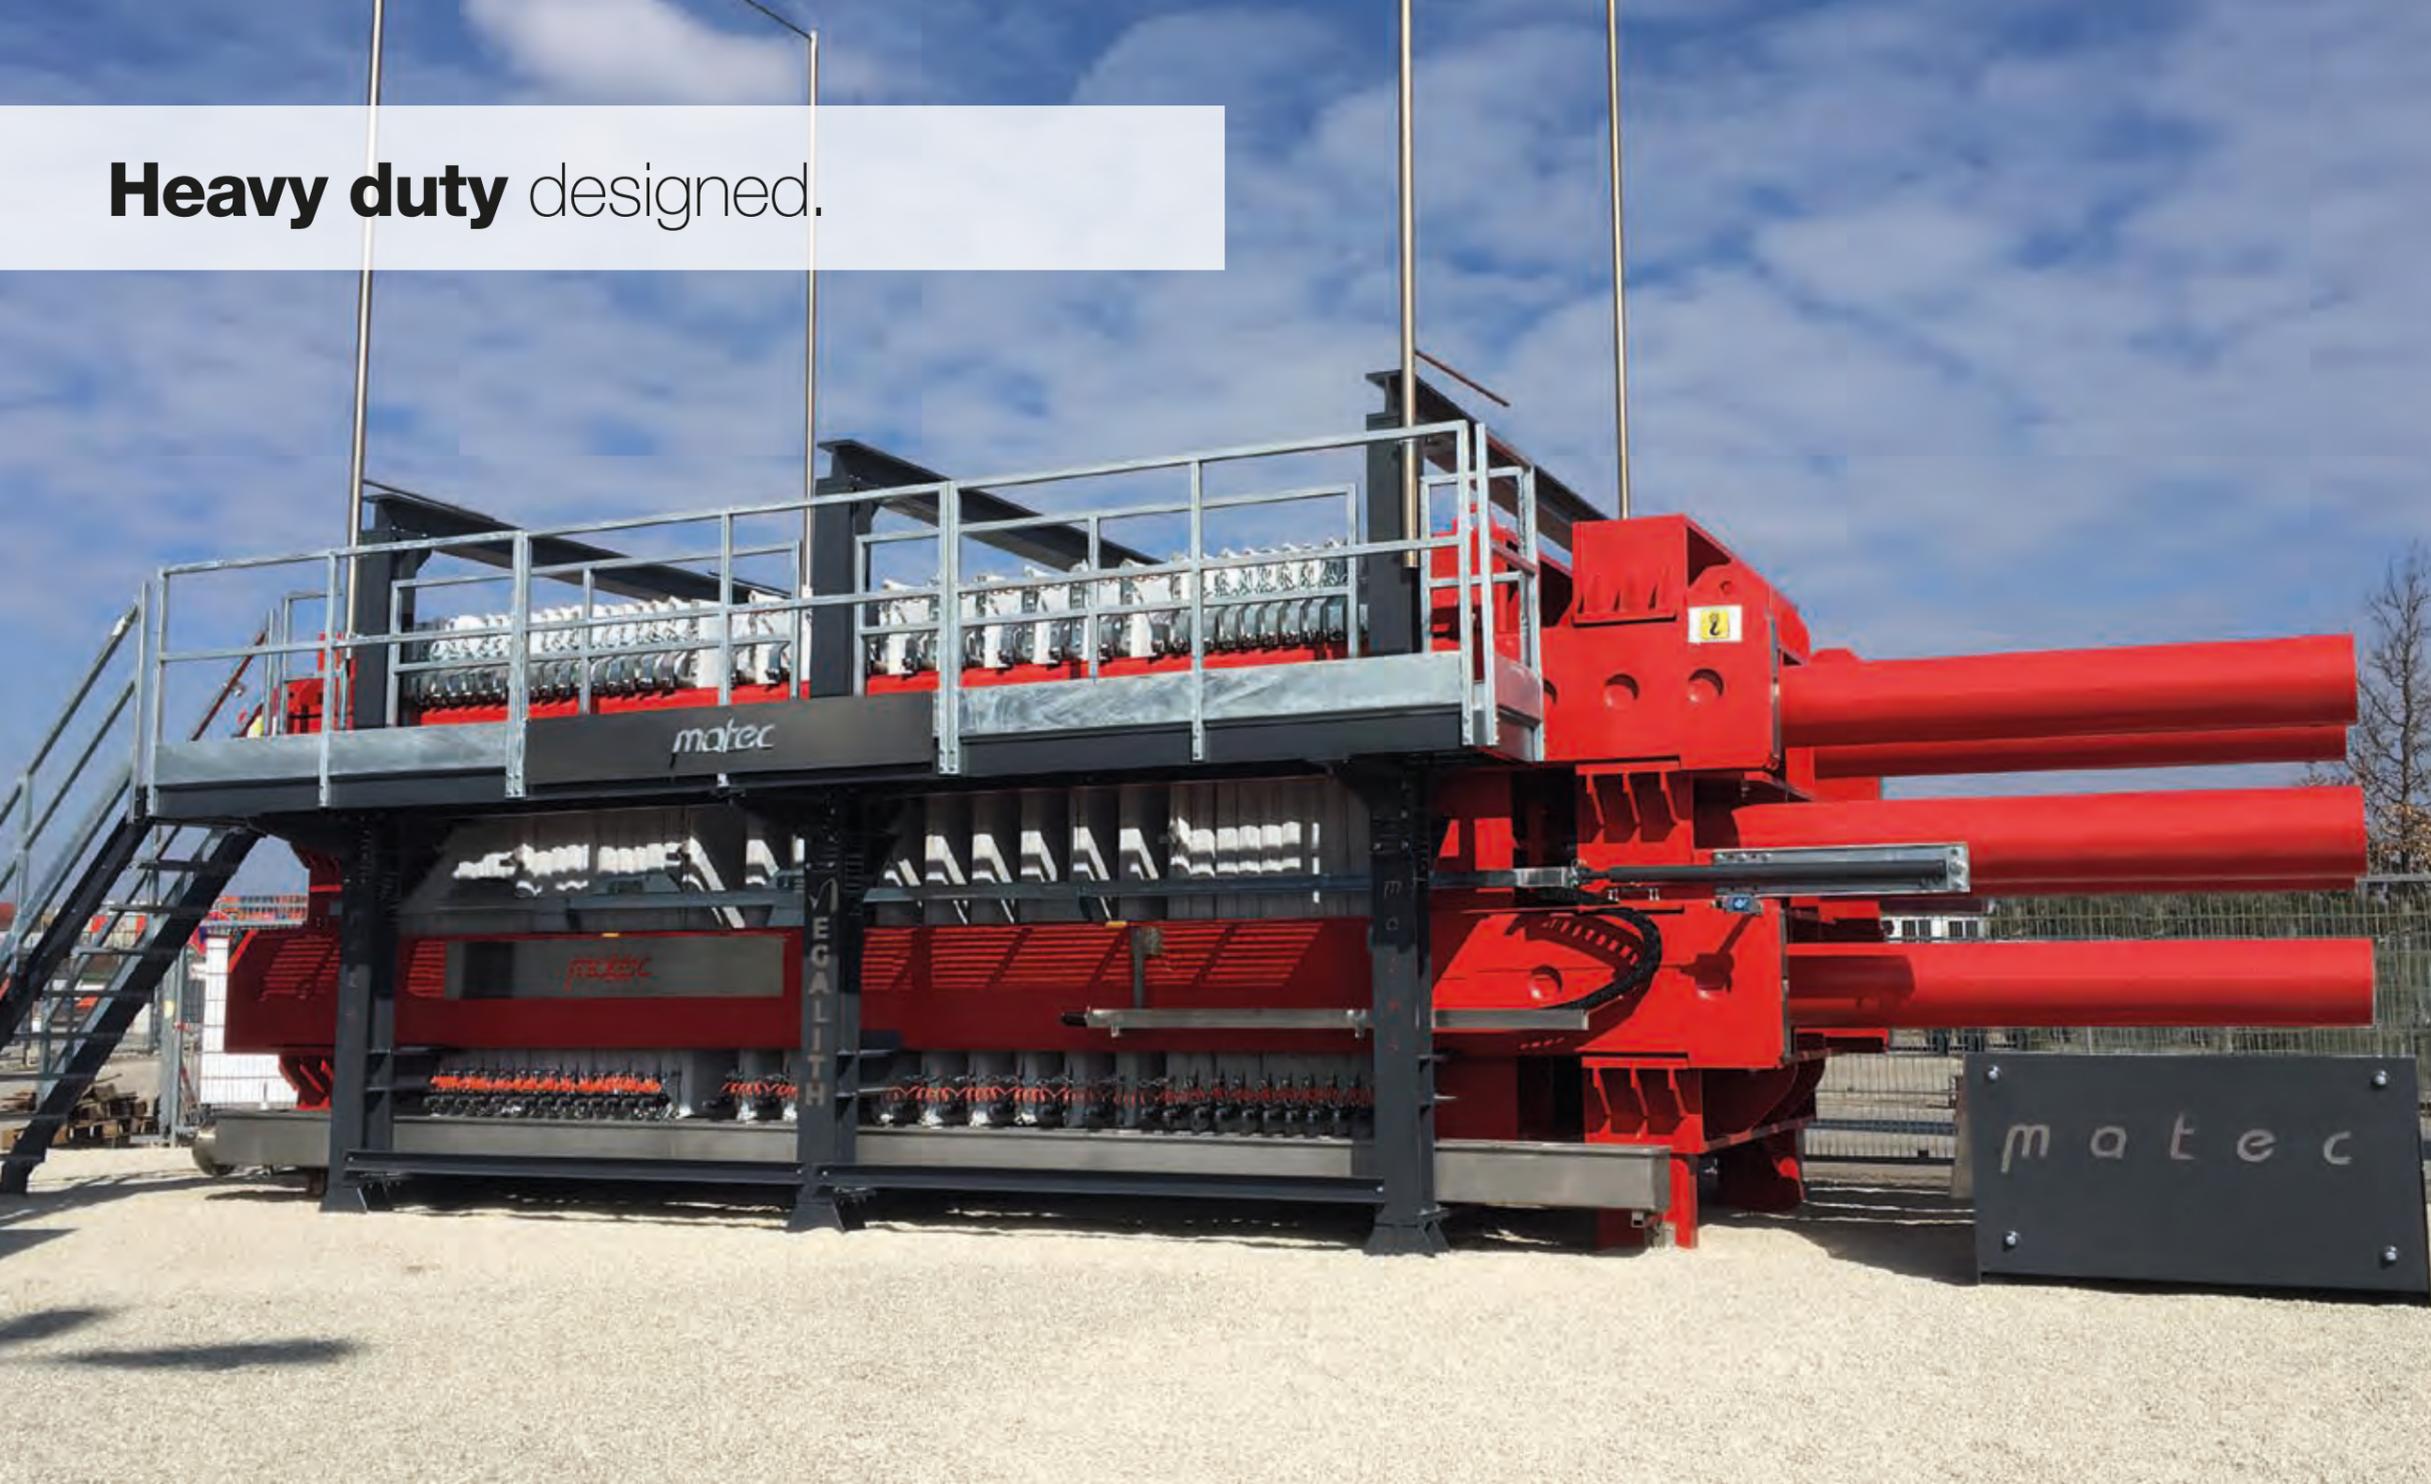

MEGALITH®

MECHANICAL DEWATERING WITH HIGH-PRESSURE TECHNOLOGY

Dewatering by high/pressure technology (HPT) means a higher force to drive or compress the filter cake, achieving a dryer filter cake as low as **10% residual moisture**, giving back up to **98% water to the process**.

The **NEW HPT30 BAR** allows you to filter at an even higher pressure than before.

The **MEGALITH** with its simple design, consisting of **6 pushing type hydraulic cylinders**, used to close the filter press, distributing the closing pressure evenly, and open the filter press of which the first 10 plates are shifted.

Also consists of the **NEW TT2** opening for the remainder of the filter plates, **opening in patches of 10**, and at a rate that makes

the **TT2 the fastest** opening technology on the market. Simple also means the filter press consists of recessed chamber plates, linked together by chain, and a shaker system consisting of pneumatic cylinders, all standard with the **MEGALITH** filter press. Structurally sound and all put together by a fixed carbon steel head, and 4 lengths of double welded rectangular tubing, for side beams. Making this filter press the only filter press capable in reaching **30 bar safely**. With the demand for filtration technology increasing and the material to be filtered becoming more challenging, the need for **NEW technology** becomes more prominent.



MEGALITH

FILTER PRESS

MEGALITH
2500X2600

STANDARD COLOR


 RAL 3002

OPTIONAL

 RAL 7024

 CLIENT
COSTUMER RAL

MEGALITH OPTIONAL



Megalith 2500x2600	Length	Width	Foot Wheelbase (L)	Foot Wheelbase (W)	Total Height	Dry Weight (kg)	Chamber volume (Liters)	Capacity per cycle (Liters)	m ³ /h (2 cycles)	Ton/h	m ³ /h (3 cycles)	Ton/h
2500/100 TT2 Fast	16130	3410	12595	2340	3170	110845	234	23166	46.33	85.71	69.49	128.55
2500/120 TT2 Fast	18010	3410	14475	2340	3170	125260	234	27846	55.69	103.02	83.53	154.53
2500/140 TT2 Fast	19890	3410	16355	2340	3170	139675	234	32526	65.05	120.34	97.57	180.50
2500/160 TT2 Fast	21770	3410	18235	2340	3170	154090	234	37206	74.41	137.6	111.61	206.47
2500/180 TT2 Fast	23650	3410	20115	2340	3170	168505	234	41886	83.77	154.97	125.65	232.45
2500/200 TT2 Fast	25530	3410	21995	2340	3170	182920	234	46566	93.13	172.29	139.69	258.42



2022



NEW PROJECTS


GIGATRON FILTER PRESS
TWIN FRECCIA ROSSA
TESTALTA FILTER PRESS

pag. 38
pag. 39
pag. 40



GIGATRON FILTERPRESS

THE BIGGEST FILTER PRESS IN EUROPE

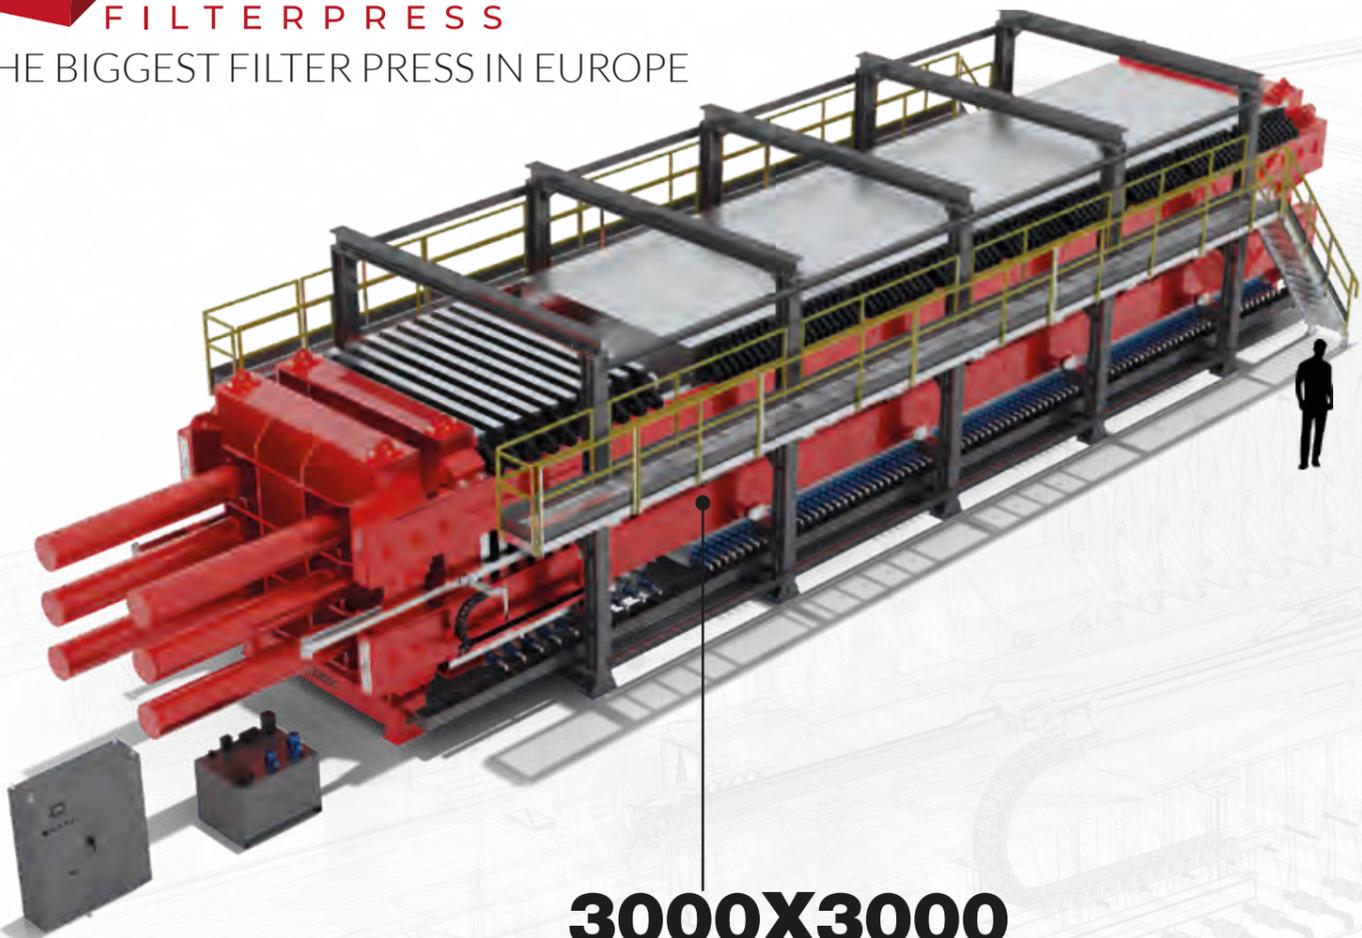


3000X3000

Especially designed for quarries and mines and heavy duty applications.

The Gigatron is available in a single solution: 3000x3000

TWINFRECCIAROSSA FILTERPRESS

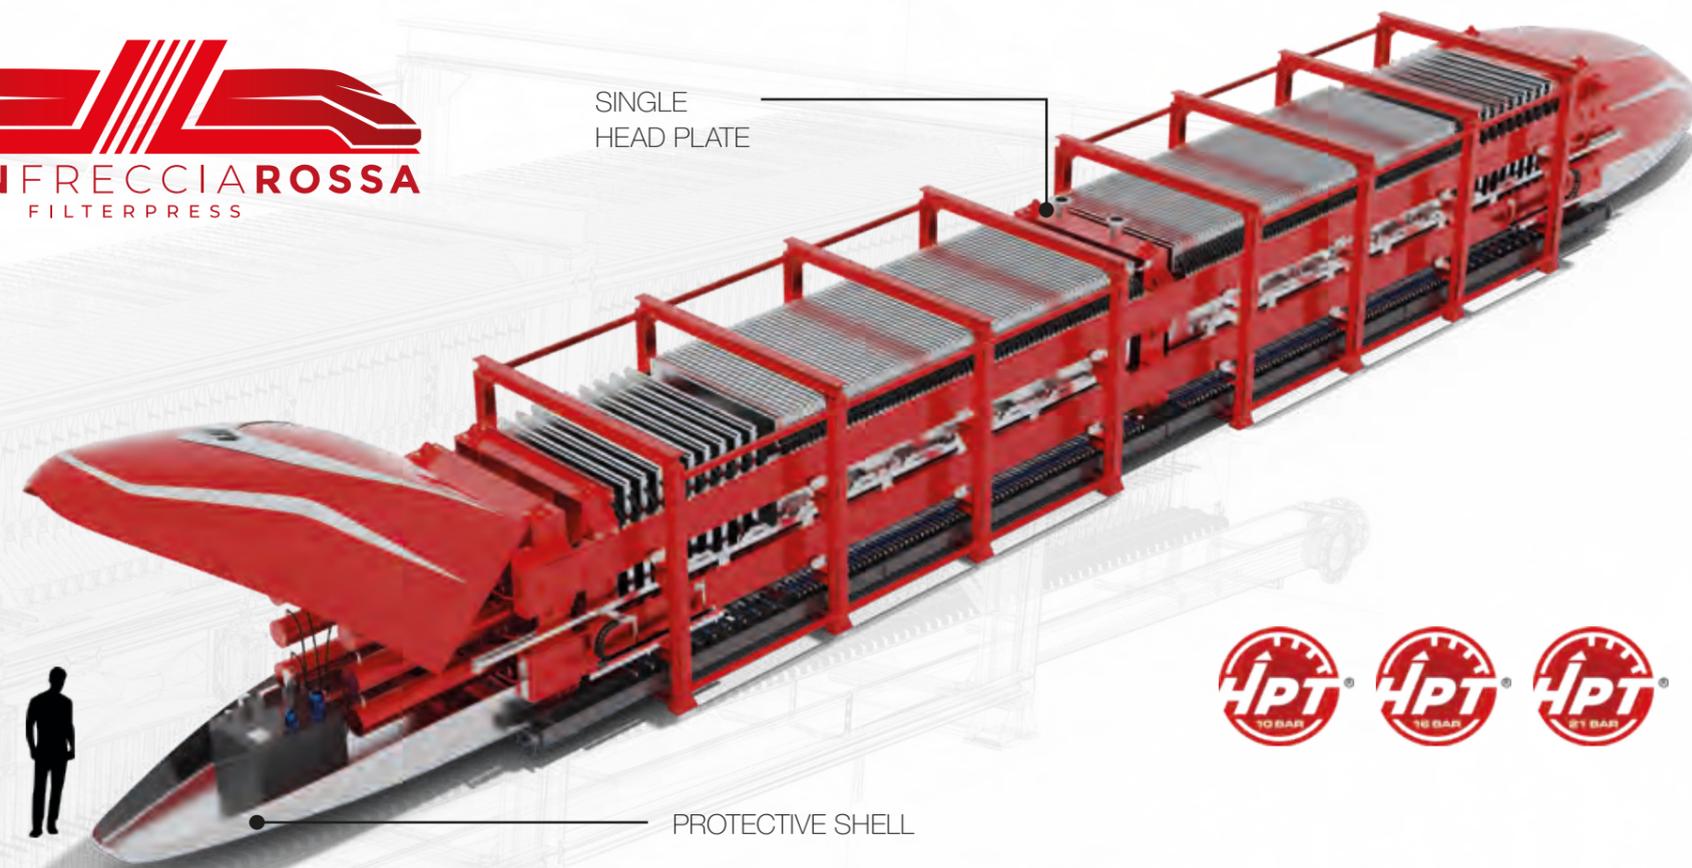

2 IN 1 FILTER PRESS

The Twin frecciarossa is a filter press which, a equal footprint, is more productive than the current state of the technique in terms of operating times and quantity of sludge to be treated.

It is also optimized from the point of view of the occupied surface, reducing the overall dimensions of the machine.

This filter press is also economically optimized, reducing the cost of the structures and engineering works necessary for operation.






The Overhead Beam Filter Press uses the same basic technology as any other filter plate press to dewater slurry material and recover reusable filtrate water.

The filter plates are suspended from an I-beam above the filter press. A hydraulic cylinder and four tension rods are used to clamp the plates together, while a slurry feed pump forces the slurry between the plates where the slurry solids accumulate and the filtrate water passes through filter cloths mounted on the plate surfaces.

The plates are opened using a chain carousel system mounted on the I-beam designed to separate the filter plates one at a time after the plate stack has been hydraulically unclamped.

The bottom and both sides of the filter plates are completely open and unobstructed, preventing any interference with the cake discharge. The overhead beam design also allows the easiest access to the filter plates and filter cloths for cleaning and maintenance.

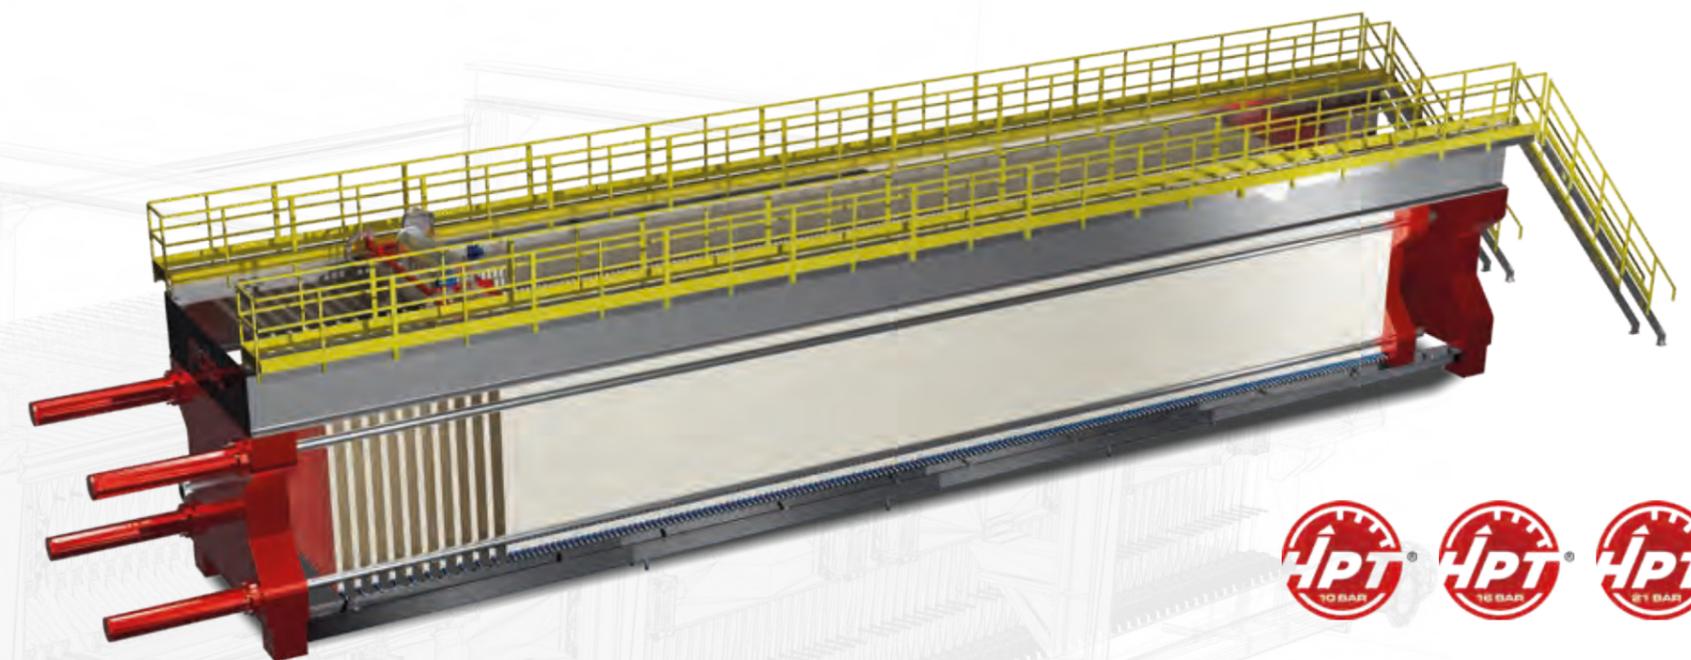

SINGLE PISTON AVAILABLE



UNIQUE SELLING POINT

- Fully automatic machinery
- Reduced idle times
- Suitable for corrosive and abrasive products filtration
- Frame never in direct contact with the product to be treated
- Plate shifting device protected by corrosion and dust
- Heavy duty structure
- Neither stress nor frame deformation
- Prompt cloths replacement
- Plates easy maintenance


Details make the difference.

Accessories

CAKE DRYER

Cd

The Cake-Dryer is a **100% automatic system** for the drying of the cakes of mud through the use of compressed air. The system is similar to the Core-Blow; the jet of compressed air is blown into the central hole of supply of the plates, thus allowing a drying of block **20 plates**, to have a **final cake completely dry**.

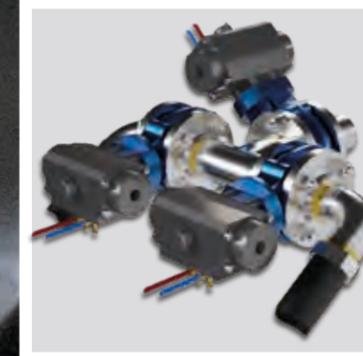

CAKE WASHING


Cw

A **close circuit system** for special mud with chemicals. It usually works together with the membrane plate system, allowing a clean water flow inside the plate chambers before cakes are discharged. This process rinses the cakes, to lower chemicals level under the **"special mud"** threshold.

CORE BLOW

Cb

Core blow system is projected to **clean the core** at the end of the filtering process from the residual unsqueezed mud gathered in the diffusion conduit through the plates. The Filter press is equipped with an air conduit in the mobile plate to blow, at the end of the filtration process, the residual liquid mud back out of the plates. An appropriate valve system let the blown mud bypass the mud pump and be discharged in the mud tank again.

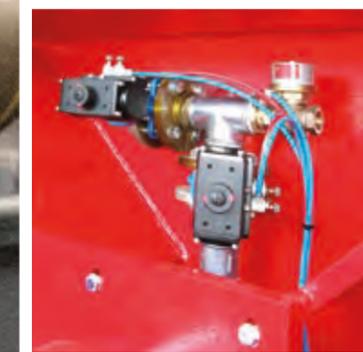

DRIP TRAY

Dt

During the filtering cycle a few drops of water can escape from the cloths, especially if these are new, so to avoid that fall of water on the mud cakes already discharged, Matec has created two particular types of drip. The **"drip tray"** system consists in a tray, composed by one or two tanks shifted, which occupies the part underneath the filter press during the filtering phase, then **collecting the drops of water that escape**; once the filtering phase has finished, the tanks are then moved by a motor to allow the discharge of the cakes.

The **"bomb doors"** model has two doors that rotate to occupy the space below the filter. They are positioned with an inclination that allows them to collect the water that comes out, and then redirect it to **lateral drips**, where it will be sent back to the waste water tank.



ACCESSORIES



AIR GASSER® AUTOMATIC SHAKER Gs

Pneumatic system to guarantee the detachment of the filtering cloth panels created with a series of high efficiency pneumatic cylinders. They lift a stainless steel bar by means of special pivots and then release the plate in order to give it a suitable vertical stress. Our **shaker** does not wear out and guarantees an efficient **vertical shaking** of the plate and the complete detachment of the mud cake.

Protection and safety systems :

- **Emergency ropes**
(Standard equipment for every Filter press)
- **Stainless steel** cover AISI 304 for machine protection and safety
- **Photoelectric barriers**
- **Safety gates**

REAL WASHING Rw

The filter press can be equipped with an **automatic washing system for plates and cloths**. The system is composed by one valve and one system of pipes on the mud head side of the filter press, and discharging valves on every single plate.

The feeding pump sends clean water to wash the residual mud. The system washes the **plates 20 by 20**. The frequency of the washing cycle is set through the operator panel.



ROBO WASH Ro

The RoboWash washing operation is a **fully automated cloth washing system** that can be put into operation at the touch of a button.

The high pressure sprayer located at the end of a drop down curtain, slides between each plate and applies high-pressure wash water to the full area of the filter cloth, dislodging and cleaning any build up of dirt on the filter cloth.



CAKE SQUEEZING MEMBRANE PLATES Sm

The membrane plates are special plates with one internal chamber and one membrane. The membrane allows a **better mechanical squeezing** of drying mud cakes. Basically, the membrane is inflated with water and grows in volume pressing on the sludge which is pumped into the chamber. A non-fixed volume is the main difference with standard plates. The special plate, together with the drainage system, guarantees a dryer final product and a more efficient filtration cycle, also the discharging of the cakes is benefited.

The material for the membrane may vary using different techno-polymers to meet customers' requirements and depending on the material to be treated, usually it is a variety of polypropylene.

TILT SENSOR Ts

This system consists of **proximity sensors**, upper and lower ones, to control the tilting of the last closing plate. In the software that manages the filter press you can set the delay time between the two sensors.

If the second sensor activates within the set time after the first one, the machine can continue its cycle normally. Otherwise an alarm will go off.



Membrane plate



Polypropylene membrane



Cake squeezing pump


HIGH LIGHTS

TT2 FAST SYSTEM



The **TT2 System** is patented by **Matec** to solve the problem of sludge discharging opening and closing dead time in filter presses. Thanks to this system that reduces also the length of the machine, the process of plate discharging has decreased from the usual 15/20 min to **3 min for 150 plates**. **This system guarantees also a 30% increase in productivity and a reduction in operating and maintenance electrical costs, in addition to an easier use of the machine.** The **TT2** works by opening the main cylinder just once, then it closes, in order to open the first **10 plates**. The quick opening of the plates is used to open 10 plates at a time through the back and forth shifting.

The two oleodynamic cylinders "TT2 Fast", installed on lateral bars and provided with mechanical modules. The opening of 2 cylinders works at high speed through the oleodynamic power unit.

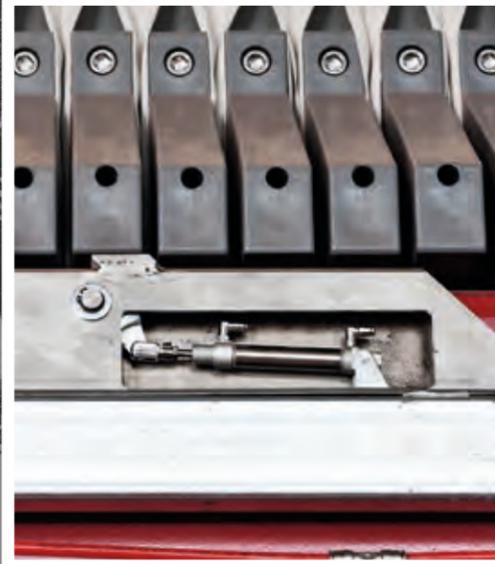

TORBIDITY SENSOR



It is placed in the fresh water storage tank. Turbidity meter consisting of a **candle measuring machine (sensor) immersed in water**, with dissolved particles. Based on the feedback that is obtained from the measurement system, it is possible to **determine where to direct the flow of water**. Through pre-set values, if it is detected a too high level of turbidity, the system switches two valves and diverts the flow of water from the fresh water tank to the waste water collection tank, to resubmit the water to the clarification phase.

MATEC MASS CONTROLLER

The **Matec Mass Controller (MMC)** is an automatic system to monitor a filtration cycle. It crosses the data received by a mass flow sensor with those received by an analogic pressure switch to know exactly when a filtration cycle is complete to prevent the variation in the cake thickness, and to prevent the cakes sticking on the cloths.



Benefits



24 Hours on site assistance



24 Months full warranty



10 Years warranty on stainless steel products



Hpt technology



Best brand high technology components



Automatic shaking and washing



Tt2 fast opening time less than 3 minutes





Clearness of results.

CLARIFICATION SYSTEM
aquatop

THICKENER DECANTER SILOS

- VERTICAL THICKENER DEEP CONE pag. 51
- RAKE THICKENER pag. 55
- PASTE THICKENER pag. 59

Deep capacity.



CLARIFICATION SYSTEM
aquatop
Deep Cone Vertical Thickener


VERTICAL THICKENER | **DEEP CONE**

The **vertical decanters** are based on the principle of static decantation and the natural precipitation of suspended solid particles. During decantation occurring inside Matec decanters, the solid particles (the mud) sink down to the bottom of the structure, while the clean water overflows into the drainage system at the top and it is discharged in a dedicated tank or pit (clean water tank).

The sedimentation of the sludge at the bottom of the silo is speeded up by using a **polyelectrolyte (flocculant)**, while the custom design and dimensions create a water column which presses over the sludge, and guarantees the required thickness of the mud.

The shape of the Matec vertical decanter, the right proportion between the cone and the upper cylinder, has been developed thanks to our experience in the filtration of waste water. The cone's inclination degree perfects the thickening of the mud and the upper cylinder can be used also an extra stocking space.

mapec
**DEEP CONE
 VERTICAL THICKENER
 THICKENER DECANTER SILOS**

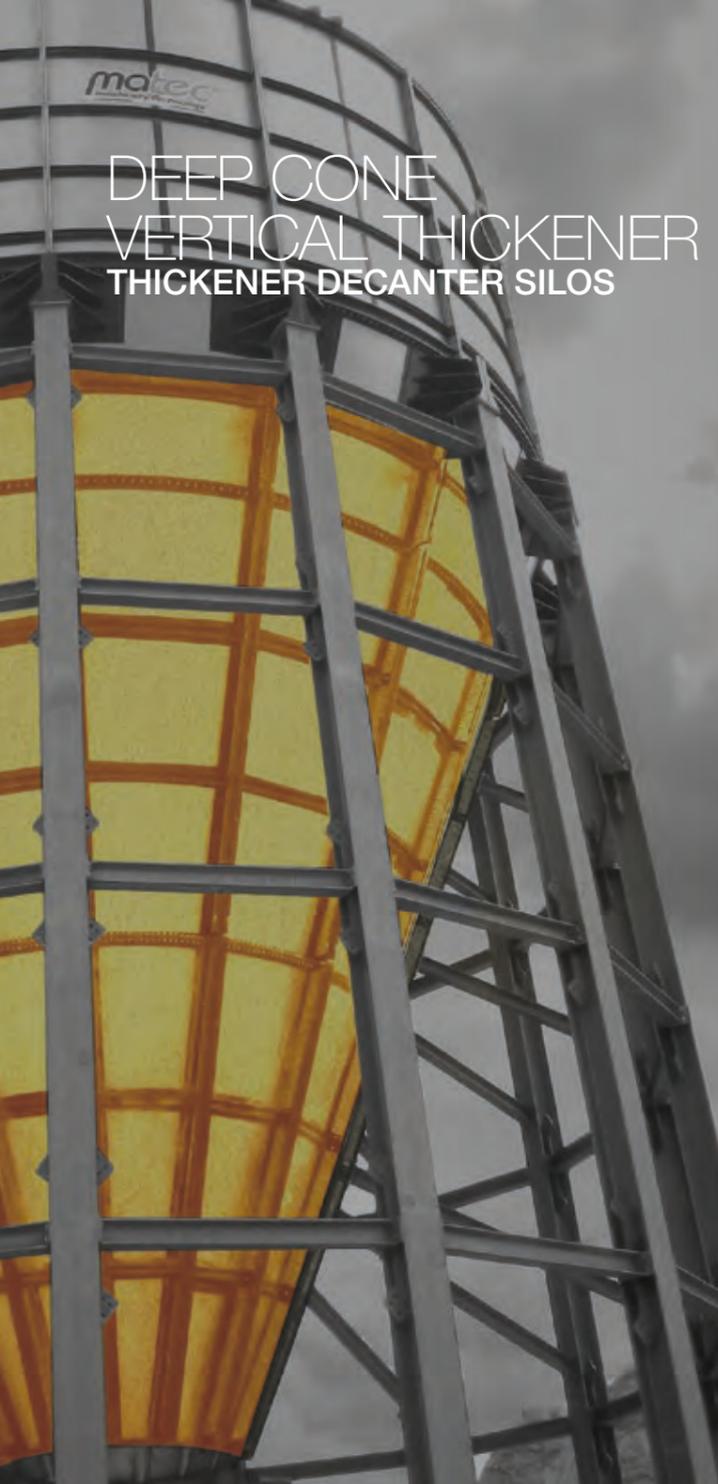

RANGE LINE
VERTICAL THICKENER

The clarification process is essential to a wastewater treatment plant. Unlike the filtration carried out by the filter press, the clarification is a continuous process that separates water from the solid particles suspended into it.

MUD SENSOR

A pressure sensor can be placed on a membrane at the bottom of the cone of the silo. The discharging valve opens only when the required density is reached.

MODEL	Capacity / lt	Diameter	Silos tot. Height mm	Cylinder Height mm	Cone Height mm
SILINOX 2000i	2000 pezzo unico	1250	3210	1250	1260
SILINOX 3500i	3500 pezzo unico	1500	3710	1500	1510
SILINOX 5000i	5000 pezzo unico	2000	4200	1500	2000
SILINOX 7000i	7000 pezzo unico	2280	3490	1250	1540
SILINOX 8000i	8000 pezzo unico	2000	4700	2000	2000
SILINOX 10000i	10000 pezzo unico	2080	5200	2500	2000
SILINOX 12000i	12000 pezzo unico	2200	5090	2500	1890
SILINOX 15000i	15000 pezzo unico	2300	6060	3500	1860
SILINOX 20000i	20000 pezzo unico	2300	6950	4100	2150
SILINOX 25000i	25000 pezzo unico	2350	8070	4870	2500
SILINOX 30000i	30000 pezzo unico	2350	9090	5890	2500
SILINOX 30000s	30000 sezioni	3000	7150	3350	3100
SILINOX 35000s	35000 sezioni	3200	7250	3350	3200
SILINOX 40000s	40000 sezioni	3400	7250	3250	3300
SILINOX 50000s	50000 sezioni	3700	7700	3500	3500
SILINOX 60000s	60000 sezioni	4000	8050	3750	3600
SILINOX 70000s	70000 sezioni	4000	8800	4500	3600
SILINOX 75000s	75000 sezioni	4500	8050	3750	3600

MODEL	Capacity / lt	Diameter	Silos tot. Height mm	Cylinder Height mm	Cone Height mm
SILINOX 90000s	90000 sezioni	5000	8600	3000	4900
SILINOX 100000s	100000 sezioni	5500	8100	2750	4650
SILINOX 110000s	110000 sezioni	5500	8700	3000	5000
SILINOX 120000s	120000 sezioni	5500	9200	3500	5000
SILINOX 130000s	130000 sezioni	5800	9700	3500	5500
SILINOX 150000s	150000 sezioni	6300	9900	3500	5700
SILINOX 190000s	190000 sezioni	6500	10700	3500	6500
SILINOX 200000s	200000 sezioni	6500	11000	3800	6500
SILINOX 240000s	240000 sezioni	7000	11950	3750	7500
SILINOX 280000s	280000 sezioni	7000	11660	5460	5500
SILINOX 300000s	300000 sezioni	8000	11500	6000	5500
SILINOX 350000s	350000 sezioni	8000	11090	4200	6890
SILINOX 370000s	370000 sezioni	8000	11390	4500	6890
SILINOX 380000s	400000 sezioni	8000	11890	5000	6890
SILINOX 450000s	450000 sezioni	8000	13390	6500	6890
SILINOX 470000s	470000 sezioni	8000	14590	7000	6890
SILINOX 500000s	500000 sezioni	8000	15550	7700	6890

Endless recovery.




CLARIFICATION SYSTEM
aquatop
Scraper Bridge Thickener
RAKE THICKENER

The horizontal decanters are ideal for the largest water flows. They have a limited height and are provided with an upper sludge thickening system.

Horizontal decanters are made of stainless steel in their middle and large versions, while the largest ones are made of concrete. The decantation principle is more or less the same occurring in vertical decanters. The rake mechanism stirs the sludge through its rotation movement pushing it to the bottom.

The discharging is automatic and adjusted to the rake effort, in order to reach the desired thickness. Sensors will give the opening input to the thickener discharging valve and the sludge will go through, to the Bifang.

RAKE THICKENER
THICKENER DECANter SILOS

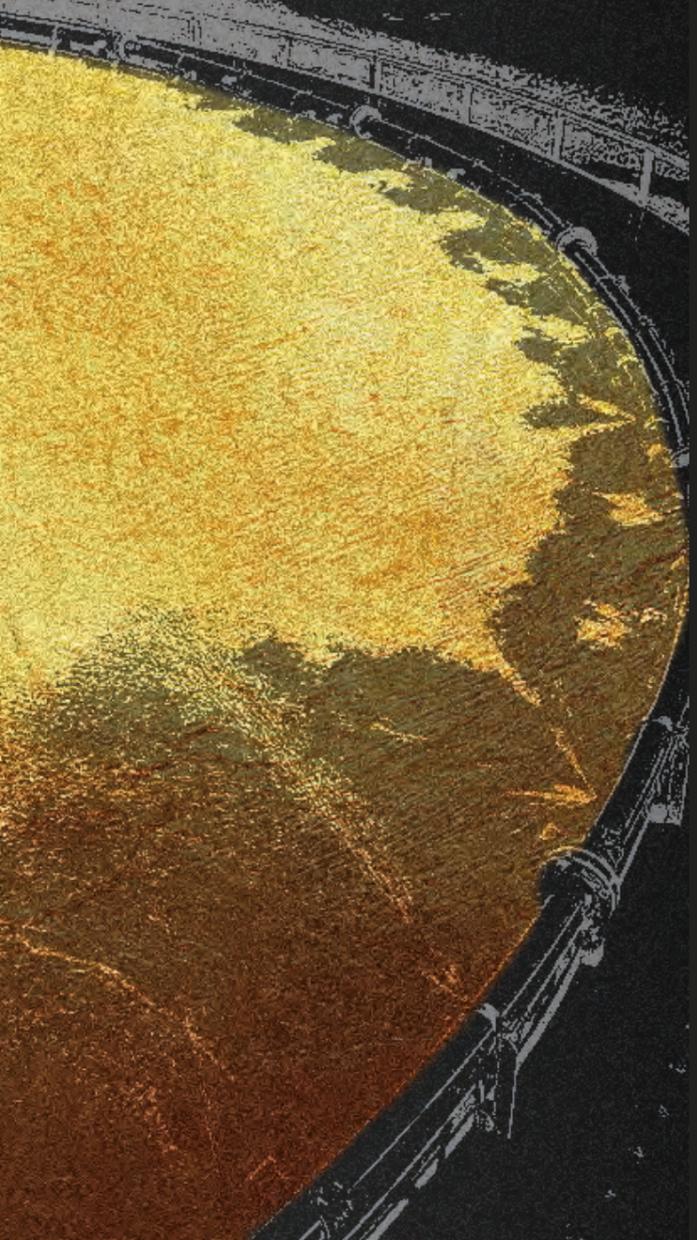

RANGE LINE
RAKE THICKENER

Matec can provide customers with any type of decanters, by designing and manufacturing vertical and horizontal ones made of stainless steel or concrete.

WHEN TO USE A HORIZONTAL RAKE THICKENER

24 meters width for the top of the range horizontal **rake thickener** by Matec. We usually suggest this typology of clarifier when the needed vertical decanters would exceed a **9 meters height**.

STAINLESS STEEL

Matec uses stainless steel to guarantee its clarifiers a long-lasting working life.

MODEL	Capacity lt/min	Clarifier diameter (mm)	Clarifier height (mm)
HZ 1000	5000	10000	2700
HZ 1200	7000	12000	3300
HZ 1400	8500	14000	3400
HZ 1600	12000	16000	3650
HZ 1800	13000	18000	3800
HZ 2000	14000	20000	3950
HZ 2200	16000	22000	4100
HZ 2400	20000	24000	4250
HZ 3000	204000	30000	4950

Simplicity in clarification.





CLARIFICATION SYSTEM
aquatop
Scraper Bridge Thickener

CLARIFIER | **PASTE THICKENER**

The overall function of the thickener is to increase the **density** of a slurry stream. This is achieved by feeding the slurry stream into the thickener and by allowing the **solids to settle**. The supernatant overflows for further processing or disposal.

In the case of a clarifier, the main function is to provide a clear overflow. The settled solids are raked to the centre cone of the thickener/clarifier and are removed as thickened slurry suitable for further processing or disposal as the case maybe.

PASTE THICKENER THICKENER DECANTER SILOS

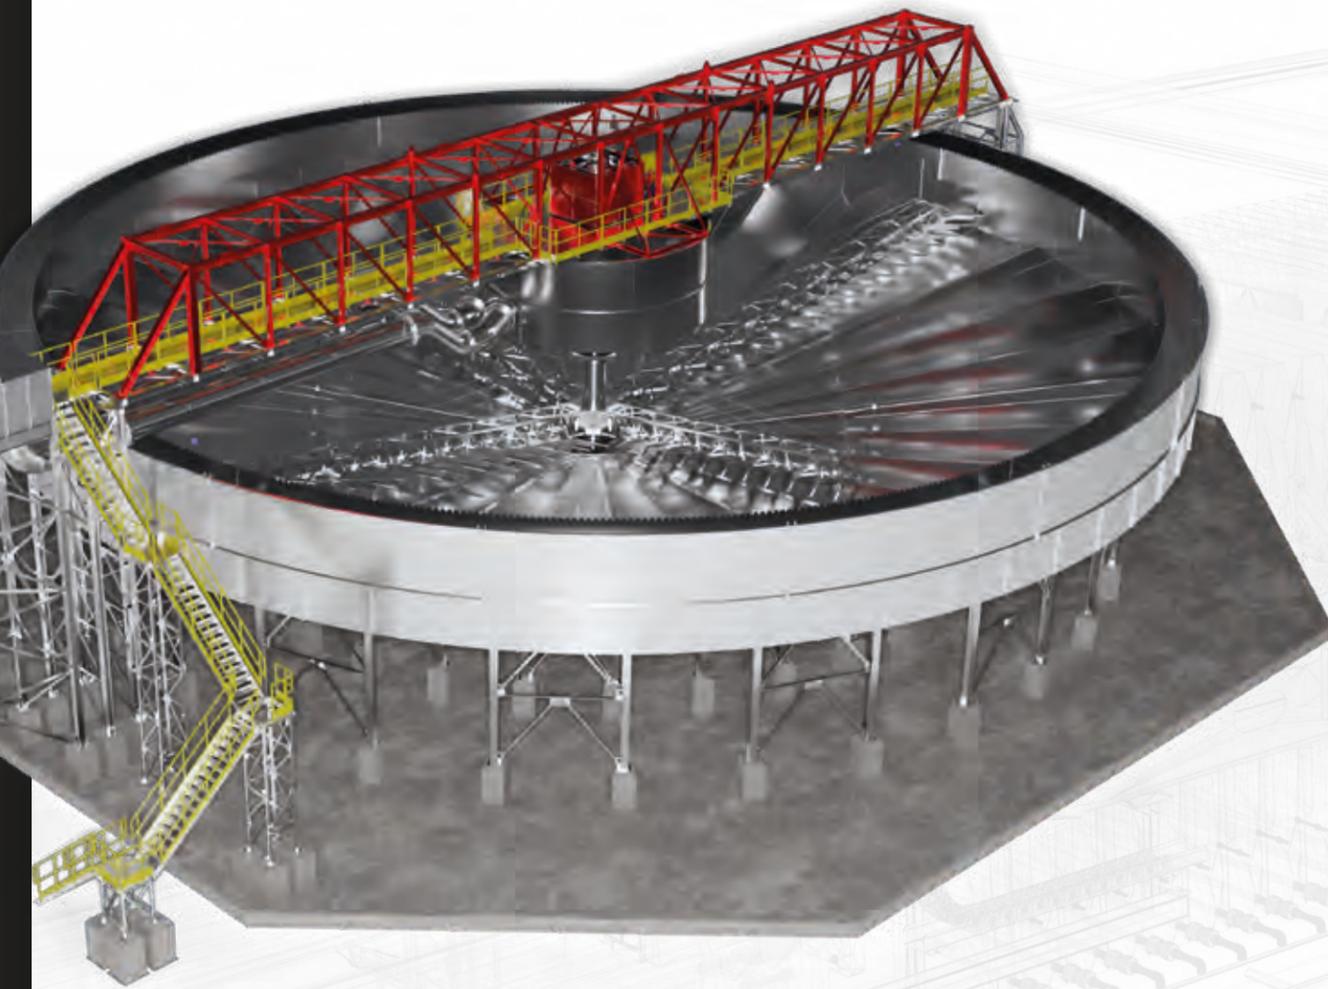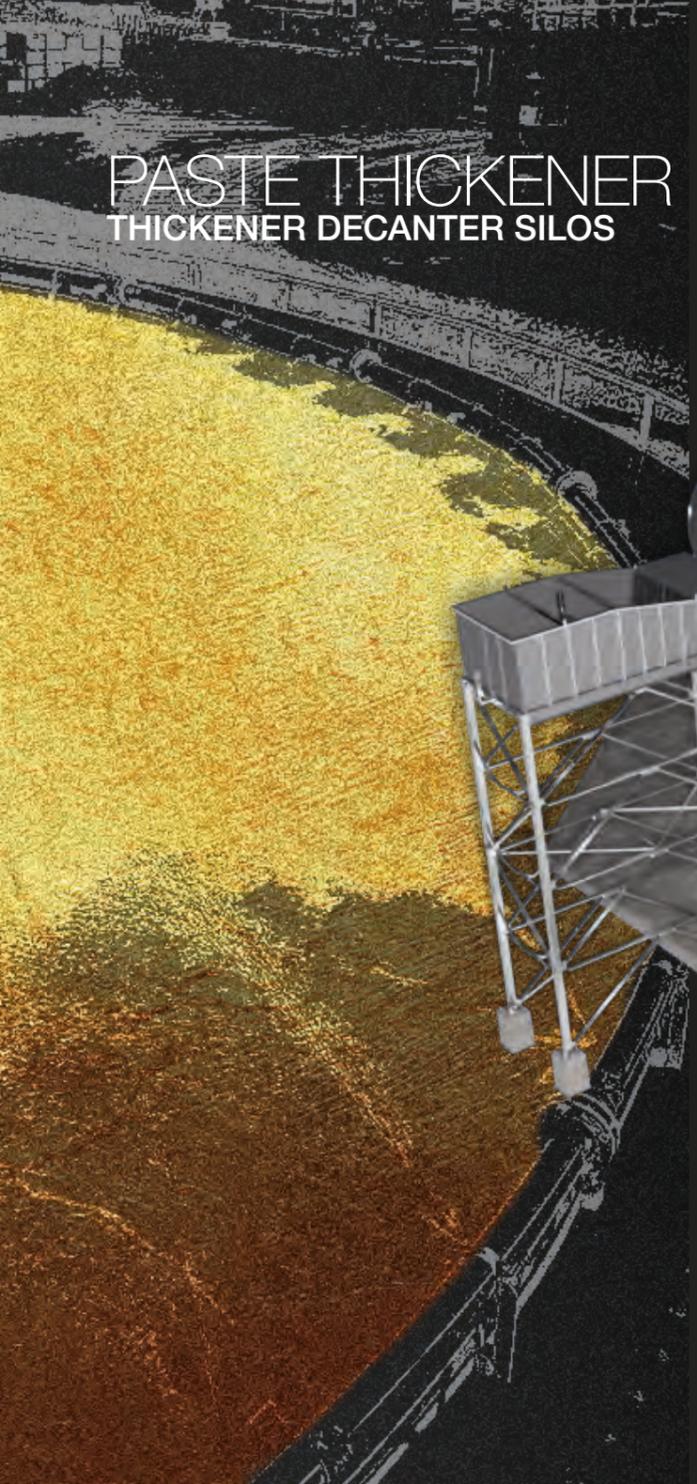

THE THICKENER TANK SPECIFICATIONS ARE AS FOLLOWS

- The tank is constructed from steel plate not less than 6 mm thick
- The tank has a scalloped bottom and sloped tank floor supported on steel legs, an underflow cone and overflow launder and all components
- Shorter erection time
- No tunnels with escape routes required
- Flexibility to change components, say launder sizing, when process conditions change
- The bridge will be supported on a separate structure
- Minimal excavation
- No design cost incurred by yourselves

MODEL	DIAMETER
PS 0006	6 mt
PS 0008	8 mt
PS 0010	10 mt
PS 0012	12 mt
PS 0014	14 mt
PS 0016	16 mt
PS 0018	18 mt
PS 0020	20 mt
PS 0022	22 mt
PS 0024	24 mt
PS 0030	30 mt
PS 0036	36 mt
PS 0040	40 mt
PS 0050	50 mt
PS 0060	60 mt



Check and reduce your costs.




AUTOMATIC FLOCCULANT UNIT

BIFLOC
SISTEMA DOSON

pag. 64
pag. 67

BIFLOC SYSTEM AUTOMATIC FLOCCULANT UNIT

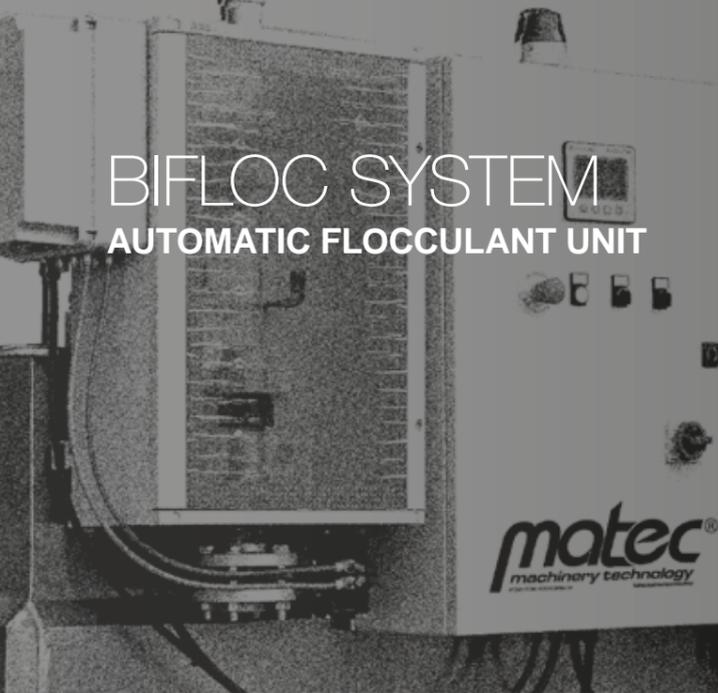

BIFLOC

POLYELECTROLYTE FLOCCULANT PREPARATION STATION

Matec allows a **fast and automatic dilution** of the powder in water for the perfect reaction of the flocculant in turbid water.

Thanks to the 2/3 tanks the perfect maturation of the product is guaranteed in order to activate all the electric charges **speeding up the decantation reaction and significantly reducing the consumption**, guaranteeing water with suspended solids below 80 ppm/mgl.

- Perfect dilution
- Fast decantation
- Clean waters



COCLY

The **Cocly** is the **automatic powder metering accessory**. It adjusts the powder automatically and it starts the water inlet valve and the pale stirrer. Cocly produce up to **50,000** liters of product without stopping and it is completely autonomous. **Cocly** is fully made of stainless steel and includes:

- Hopper: 25-50-75-100 Kg
- Screw metering pump
- Digital or manual regulator, this accessory reduces the consumption of flocculant by about 15%

The accessories of the metering plants make the set-up process even more complete and automatic by **reducing the consumption of the product and eliminating the need for an operator**.

Matec's plants are all made of stainless steel. The right dose, the best result and great savings.



Bifloc 2000


BIFLOC RANGE

MODEL	Capacity / lt	Width (mm)	Length (mm)	Height (mm)	Screw Pump (kw)	Stirrer (kw)	Pump (kw)
Bifloc 300 round	300	400	900	800	0,22	0,37	0,25
Bifloc 500 round	500	450	900	1220	0,22	0,37	0,25
Bifloc 1000 rotondo	1000	685	1600	950	0,22	1,1	0,25
Bifloc 2000 square	2000	900	1800	1250	0,22	1,1x2	1,5
Bifloc 3000 square	3000	1100	2200	1250	0,22	1,1x2	1,5
Bifloc 4500 square	4500	1400	2670	1250	0,22	1,1x3	1,5
Bifloc 6000 square	6000	1250	4000	1250	0,22	1,1x3	4
Bifloc 9000 square	9000	1500	4500	1500	0,22	1,1x3	4
Bifloc 12000 square	12000	1500	5400	1500	0,22	1,1x3	4



Bifloc 4500 with doson

DOSON AUTOMATIC FLOCCULANT UNIT

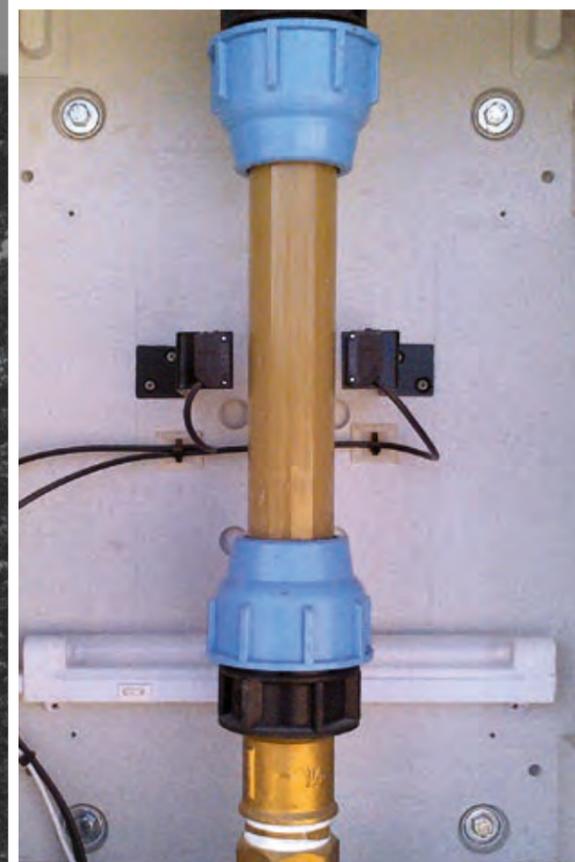

SAMPLING



SETTLING



WASH CHECK

DOSON

Doson is a **photocell-based system patented by MATEC for monitoring and adjusting the flocculant according to the amount of suspended solid particles in the water.** The Doson system regularly takes few samples of the sludge and analyzes them in a closed chamber by using electronic sensors. It adjusts the dose of the product according to the materials it contains and also the decantation speed in that specific time of the cycle.

WHY INSTALLING DOSON

Water is always clarified in the best possible way. It is essential when the properties of the sludge treated change during the days.

REDUCED CONSUMPTION

DOSON **reduces** the consumption of flocculant by **30%** and it is fully automatic, no operator needed.



The storage of you process.



SLURRY HOMOGENIZER TANK



BIFANG SLURRY HOMOGENIZER TANK



MATEC PROBE SYSTEM

The four probe system is something peculiar of Matec, because we want the system to be always efficient. It consists of a **steel tank and one or two stirrers driven by a motor.**

The mud arrives in the Bifang discharged from the decanter silo. One peculiarity of our homogenizer tank is that it has four probes:

- two of them detect the level of the mud (maximum and minimum).
- the one which almost reaches the bottom of the tank is the one connected to the low mud alarm.
- then there is another probe which resets the low mud alarm.

WHY A BIFANG

The perfect complement, which guarantees the best performances of your filter press.

OPERATION

The slurry homogenizer tank is used to keep in **constant movement the slurry discharged by the decanter silo**, in order to maintain a certain density and avoid its setting.



Bifang homogenizer tank

The Bifang keeps the mud at the right thickness by stirring it, in order to facilitate the filtration process. The mud arrives into the Bifang tank from the decanter silos. The mud is sent to the filter press from the homogenizer tank (Matec Bifang).

MODEL	Capacity / lt	Diameter (mm)	Height (mm)	Stirrer (kW)
Bifang 300	300	750	750	0,37
Bifang 500	500	750	1200	0,37
Bifang 1000	1000	950	1500	1,5
Bifang 2000	2000	1300	1500	1,5
Bifang 3000	3000	1600	2000	1,5
Bifang 5000	5000	1800	2000	1,5
Bifang 10000	10000	2050	3500	1,1
Bifang 20000	20000	3500	2100	2,2x2
Bifang 30000	30000	3500	3350	2,2x2
Bifang 40000	40000	4000	3200	2,2x2
Bifang 50000	50000	4000	4000	2,2x2
Bifang 60000	60000	4500	3800	2,2x2
Bifang 80000	80000	5000	4100	2,2x2
Bifang 100000	100000	5000	5100	2,2x2
Bifang 150000	150000	6000	5350	2,2x2




Pump manufacturer since 1971



PUMPS & VALVES

HORIZONTAL CENTRIFUGAL PUMPS	pag. 74
VERTICAL PUMPS	pag. 76
HYDROCYCLONES & SUB. PUMPS	pag. 77
OTHER PUMPS	pag. 78
VALVES	pag. 79

CENTRIFUGAL PUMPS & VALVES

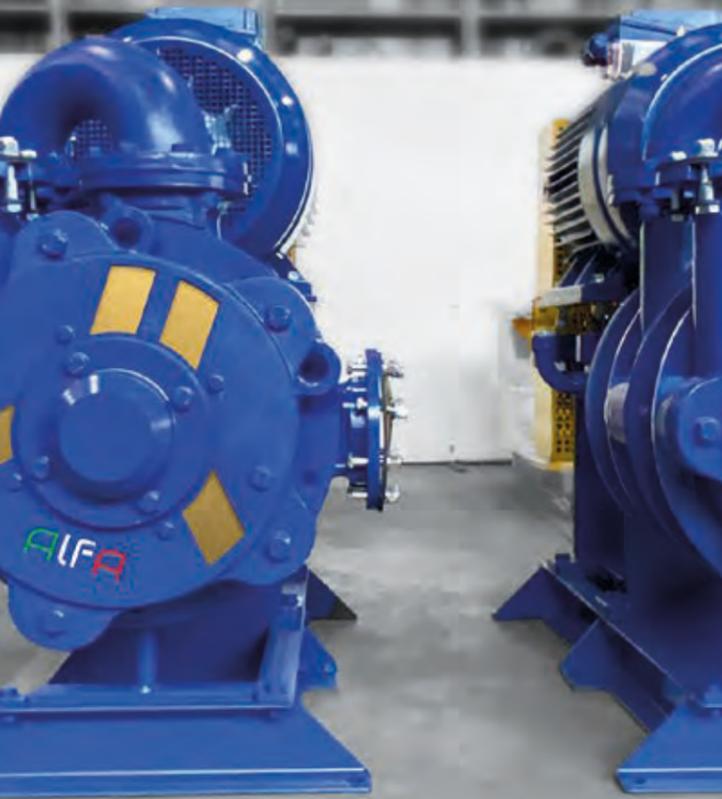

RUBBER LINE

Specifically designed to feed **filter presses**; these pumps can be supplied with single or double-speed motors, with pump-motor coupling through belts and pulleys, or with direct coupling through coaxial joint.

Delivery rates range from **100 lt/min** to **10,000 lt/min** with indoor pressures up to **21 bars**, according to the different versions.

Bodies and impellers of **Alfa Pumps** can be made of **super alloys** or **spheroidal cast iron coated** with special anti-abrasive rubber moulding.



SINGLE STAGE



RUBBER



DOUBLE STAGE



RUBBER



HARDALLOY LINE



SINGLE STAGE



HARDALLOY



DOUBLE STAGE



HARDALLOY



TRIPLE STAGE



HARDALLOY



CENTRIFUGAL PUMPS PUMPS & VALVES



FRONT SUCTION PUMPS



The suction inlet is positioned so that the sludge does not come into direct contact with the mechanical seals, which are made of **tungsten carbide**, drained with water and protected by a pressurised barrier chamber (stop).

The functionality of the bearings is guaranteed by oil-bath lubrication.



VERTICAL PUMPS

Vertical pumps, produced with both direct joint coupling and trapezoidal belts and pulleys, are mainly used for loading settling tanks/clarifiers (both static and dynamic) or for transferring **waste waters** and **slurries**.

The delivery rates range from **100 lt/min** up to over **8.000 lt/min** and the heads up to about **30 mca**.

- **GEYSER:** pump for thick sludges
- **TOWER:** vertical anti-abrasive pump with transmission belts and pulleys
- **SPUTNIK:** vertical anti-abrasive pump with direct coupling



SUBMERSIBLE PUMPS

This pump can be completely immersed into the liquid to be transferred; it can therefore be used in situations with limited spaces, very deep pits and wells, etc.

The pumps bodies can be internally coated with anti-abrasive rubber. Delivery rates range from **100 lt/min** to about **4,000 lt/min**, with heads reaching **over 30 mca**.



CLEAN WATER PUMPING GROUP

Alfa Pumps designs and manufactures pumping groups for clear waters that seamlessly integrates into the waste water purification and recycling plant.

Single-stage horizontal pumps are used, with **cast-iron** or **bronze** body and impellers, mechanical wide seals, stainless steel shaft.





◀ PNEUMATIC DIAPHRAGM PUMP

A diaphragm pump is a positive displacement pump which utilizes flexible diaphragms that reciprocate back and forth, creating a temporary chamber.

MODEL	m ³ /h
MT2	15
MT4	23
MT8	45
MT12	50
MT15	60
MT20	80

PISTON PUMP

This kind of pump is used to manage small and medium flow rate. Generally the maximum flow rate managed with these pump is 500 l/h of flocculant solution.



▲ SCREW PUMP

This kind of pump is used to manage big flow rate. This pumps are also used when the optional DOSON is included.



GATE VALVES
manual



BALL VALVES
manual or pneumatic



PINCH VALVES
manual or pneumatic



BUTTERFLY VALVES
manual or pneumatic



KNIFE GATE VALVES
manual or pneumatic

VALVES - MANUAL OR PNEUMATIC



AUTOMATIC FILTERS

FILTERS WITH BATTERIES OF AUTOMATIC VALVES MID/HIGH FLOW RATES

Filter material:

- quartz sand for DP.
- activated carbon for KP.
- catalytic mixture based on Pyrolusite (manganese dioxide) for DFP.
- battery valve set composed by 5 diaphragm valves in cast iron, for models up to DN100 size.
- battery valve set composed by 5 butterfly valves, formodels starting from DN100 size.
- distribution system made of ABS and PP and arm collector system.




SPECIAL PROJECT

THE CUBE
MARBOLINE
KOMPAKT
BIG BAG

pag. 83
pag. 88
pag. 90
pag. 91

Mobility is the answer.



CUBE®

100% MOBILE PLANTS

The **CUBE** plant uses the same "hardware" of a fixed plant:


- **THICK IRON TO WITHSTAND HPT PRESSURE.**
- **SINGLE CHAMBER DRAINAGE SYSTEM.**
- **ACCESSORIES TO PERFECT PLANT.**

The same **quality** is obtained through the attention to details, perfection was required for an ambitious project and an ambitious design.

SECTORS

Apart from the usual sectors, the **CUBE** can be largely used in the following applications:

- **TEMPORARY WORK**
- **DREDGING**

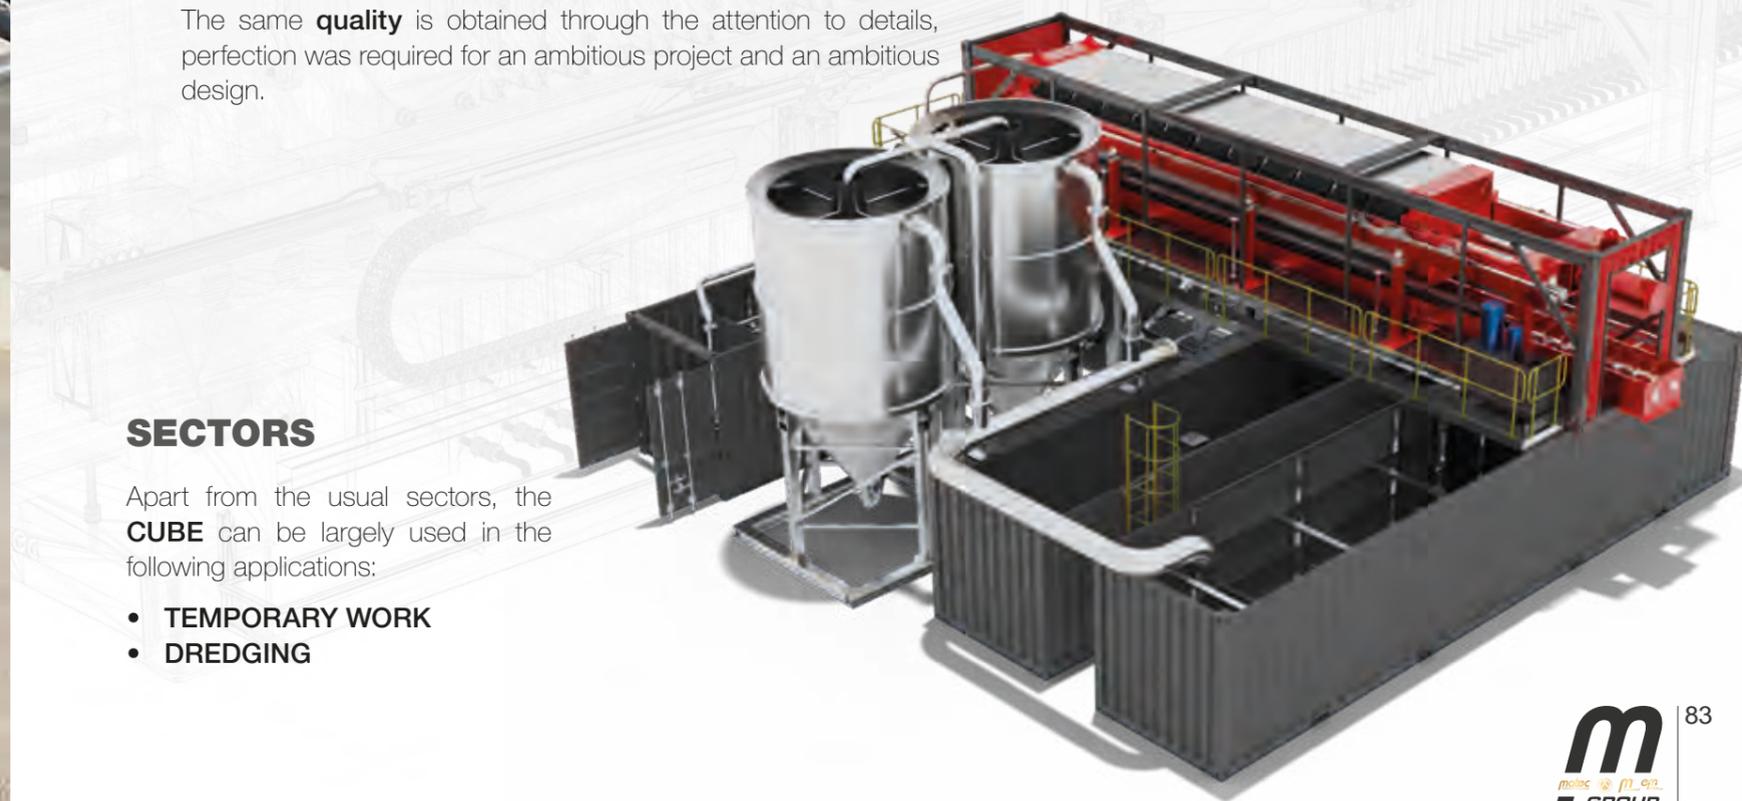

THE CUBE SPECIAL PROJECTS



THE "PIECES" OF THE CUBE

The **Cube** consists of a number of containers, from **3** to **10**. The core of the plant is the filter press, as always, for which we dedicate one or more containers (according to the number of machines). The other parts of the Cube are: **the decanter(s), the Bifloc system, the Bifang system, the dirty water tank and the clean water tank.**



1



2



3



4



5



6

1. MATEC HTP FILTER PRESS

The compact and proven solution for highest throughput and driest cake results with an integrated removal system.

2. DECANTER

Made of stainless steel and perfectly sized even for the mobile application, the Matec decanter guarantees great results in terms of water clarification.

3. BIFLOC

The **MATEC** flocculant preparation system that is fully integrated in one container.

4. BIFANG

The Bifang container may house multiple homogenizer tanks to keep the sludge at the perfect thickness for the filter press.

5. DIRTY WATER CONTAINER

Container that receives the waste water and slurry to be treated.

6. CLEAN WATER CONTAINER

Container for the clarified water, also the clean water source for the flocculant preparation.

THE CUBE SPECIAL PROJECTS



PERFECTLY SIZED

A closer look at the filter press perfectly fitting in its container.



CAREFULLY DESIGNED

The drainage system with water discharged from the taps.



AS PRODUCTIVE AS ALWAYS

The screw of the conveyor system below the filter press.



READY TO GO

The loading operation of the Cube is way faster than the standard's.



CUBE: STANDARD SPECIFICATIONS

Filter press model	Container Length (mm - ft)	Container Width (mm - ft)	Container Height (mm - ft)	Dry Weight (kg - lb)	Chamber Volume (l - gal)	Capacity per cycle (l - gal)	m ³ /h (2,5 cycles)	Ton/h
CUBE IGNIS 800x800	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	17000 - 37500	18,2 - 4,8	2184 - 577	5,46	10
CUBE IGNIS 1000x1000	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	18000 - 39700	29,1 - 7,7	3492 - 922	8,73	14
CUBE TERRÆ 1300x1300	13800 - 45'	2350 - 7' 9"	2700 - 8' 11"	29000 - 64000	47,3 - 12,5	5676 - 1500	14,19	20
CUBE TERRÆ 1500x1500	13800 - 45'	2350 - 7' 9"	2700 - 8' 11"	35000 - 77200	63,1 - 16,7	7572 - 2000	18,93	30
CUBE TERRÆ 1500x2000	13800 - 45'	2350 - 7' 9"	2700 - 8' 11"	40000 - 88200	84,7 - 22,4	10164 - 2685	25,53	40

Decanter model	Diameter (mm - ft)	Total Height (mm - ft)	Cone Height (mm - ft)	1 Container Volume (m ³)	2 Container Volume (m ³)	3 Container Volume (m ³)	4 Container Volume (m ³)
ROUND 20	2350 - 7,7	4000 - 13,1	2000 - 6,6	20	40	60	120
ROUND 40	2350 - 7,7	9000 - 29,5	2000 - 6,6	42	84	126	252
ROUND 20 FLAT	2500 - 8,2	4000 - 13,1	2000 - 6,6	23	46	69	138
ROUND 40 FLAT	2500 - 8,2	9000 - 29,5	2000 - 6,6	50	100	150	300
ROUND 20 EUROPE	3000 - 9,9	6000 - 19,7	2000 - 6,6	47	94	141	282
ROUND 40 EUROPE	3000 - 9,9	9000 - 29,5	2000 - 6,6	70	140	210	420

Decanter model	Container Length (mm - ft)	Container Width (mm - ft)	Container Height (mm - ft)	Container Number	Volume (m ³)
SQUARE 100	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	2	100
SQUARE 200	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	4	200
SQUARE 300	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	6	300
SQUARE 400	12200 - 40'	2350 - 7' 9"	2700 - 8' 11"	8	400

Any project can be customized in accordance to the client's requirements, including filter press number and dimensions, decanters. Round decanters can be transported it by truck, whereas square ones can be installed and moved in container or flat reek.

MARBOLINE SPECIAL PROJECTS



MARBOLINE

The Matec 100% mobile plant on skid "MARBOLINE" is designed and manufactured for the quarry, in which there are different collecting points for water and plant mobility is an essential requirement. The plant is an efficient solution also for stone processing workshops.

Through a complete and compact solution, Matec guarantees great results in terms of quantity and quality to recover and reuse the water used for quarrying and processing. Meanwhile, the dry cake output can be disposed of easily and cheaply.

A Matec plant on skid installs one **AQUÆ 400** filter press with a variable number of plates and also all the other components a complete and compact system for the purification and filtration of water consists of:

100% AUTOMATIC
100% MOBILE
NO CIVIL WORKS
PRE-WIRED

Every project is fully customizable in its configuration

Aquæ 400x400 Model	Total Length (mm)	Total Width (mm)	Footbase Length (mm)	Footbase Width (mm)	Total Height (mm)	Dry Weight (Kg)	Chamber Volume (L)	Capacity per cycle (L)	m ³ per cycle	Ton per cycle
400/3	1290	770	510	430	800	350	4,2	12,60	0,02	0,03
400/5	1620	770	740	430	800	350	4,2	21,00	0,03	0,04
400/10	2560	770	1320	430	800	450	4,2	42,00	0,04	0,08
400/15	3510	770	1930	430	800	500	4,2	63,00	0,07	0,11



KOMPACT & BIG BAG SPECIAL PROJECT

KOMPACT

The Kompact plant is the plant that guarantees the quality of larger plants at the service of small businesses. It is designed for users who have flow rates from 200 to 700 l / min and who have a limited storage space that requires compact mud.

Everything is integrated into the plant structure, and the clear water tank and the settler are combined. In a small space of about 2.5 x 2.5 x 5 meters in height, Kompact brings together all the components and quality standards typical of larger plants:

- Stainless steel decanter, from **5000** to **15000** liters
- **Bifloc** system
- Filter press **Aquae** 400 x 400

Optional:

The installation of a special structure for easier mobility, ideal on building sites, in quarries or wherever there is a need to filter different water collection points:

- Cloth washing
- Unloading containers
- Ramps for transferring mud (Big bag)



BIG BAG

To respond to the requests of medium-small laboratories in the stone sector, **Matec** produces plants for the purification of waste water and sludge flows up to **400-550 liters per minute**, with the **same quality** and the **same clarification levels typical of larger plants**.

Matec manufactures systems equipped with filter bags, known as **Big Bags** (90 cm x 90 cm x 120 cm), made to measure of stainless steel silos.

Plants with 1 or 5 **Big Bags** can produce from **1500 Kg to 7500 Kg** of mud, with or without a plant for the flocculant.



We don't just filtrate we wash everything.



SANDTEC
AGGRETEC
SCREENTEC
BUCTEC
SCRUBTEC
ATTRITEC

pag. 96
pag. 97
pag. 98
pag. 99
pag. 100
pag. 101

Big project, one simple solution.



WASHING

FROM **WASHING** TO **FILTRATION** WITH MATEC
STEP BY STEP TO **GREAT RESULTS**

Matec is a well-established leading company in the designing, manufacturing and installation of purification and filtration plants. After **over 18 years of experience** and hundreds of washing plants we have started our dedicated line of washing systems, to offer our customer a solution which has been conceived to work with our purification and filtration plant. Thus, the best result is guaranteed.

The creation of systems which harmonize cutting-edge industry and the environment has always been our main objective. As a matter of fact, our machines, from the washers to the filter press, comply with regulations in terms of water and materials. Searching for innovation, to offer customers complete and efficient plants in the **aggregates, recycling, sand production and mining sectors**.

100% Made in Italy products to be assembled in our headquarters in Massa, in one of our branches worldwide (USA, Brazil, Australia, Turkey or India) or on site, thanks to the work of a great team of engineers and technicians.

In addition, Matec will offer you pre-sale assistance for your customized plant, perfect for your needs, and **after-sale assistance** thanks to global dealer network, because we believe in working with local people to best serve our customers, wherever they are. Our machines can be stationary or modular ones, according to the requirements of the plant.

WASHING PLANTS



SANDTEC

Sandtec is designed to **recover fines and ultra-fines** present in the slurry coming from aggregates washing plants. Compactness is one of the key feature of Sandtec, which has been conceived for uses in which the feeding material oversize is minimum.

It guarantees the recovery of about **90% of fines over 75 microns**, the almost total elimination of clay and lime impurities, the recovery of materials with a residual moisture below **15%** and the reduction of the solids present in the discharge water with reduction of materials to be treated in the water treatment plants.

AGGRETEC

Aggretec is the quick to install solution for sectors such as aggregates, recycling, remediation and mining. Since the system is **semi-mobile**, it becomes highly portable and also ideal for working in construction and demolition sites. Aggretec proves to be equally effective in applications with raw material. Imagine to have a Sandtec, a Screentec, a feeding hopper and 3, 4 or more conveyors in a single machine.



MODEL	Waste water flow		Max sand output	Max sand output			Dewatering screen				Pump	Pump Power	DS Power	Weight	
	Lpm	Gpm		tph	n°	Ø mm	Ø in	width mm	width ft	length mm				length ft	Model
SH-035-180	3000	792	35	1	500	19,69	900	2,95	1750	5,74	W 6/4	22	1.6+1.6	5000	11000
SH-045-180	3000	792	45	1	500	19,69	1200	3,94	1750	5,74	W 6/4	30	2.2+2.2	5700	12540
SH-065-250	4000	1056	65	1	650	25,59	1200	3,94	2750	9,02	W 6/4	30	2.2+2.2	7300	16060
SH-045-300	5000	1320	45	1	650	25,59	1200	3,94	1750	5,74	W 6/4	37	2.2+2.2	6000	13200
SH-065-300	5000	1320	65	1	650	25,59	1200	3,94	2750	9,02	W 6/4	37	2.2+2.2	7500	16500
SH-080-300	5000	1320	80	1	650	25,59	1500	4,92	2750	9,02	W 6/4	37	3.6+3.6	8000	17600
SH-100-300	5000	1320	100	1	650	25,59	1500	4,92	2750	9,02	W 8/6	37	3.6+3.6	8800	19360
SH-120-350	6000	1584	120	2	500	19,69	1500	4,92	2750	9,02	W 8/6	45	3.6+3.6	9800	21560
SH-120-500	8000	2112	120	2	500	19,69	1500	4,92	2750	9,02	W 8/6	55	3.6+3.6	9900	21780
SH-150-500	8000	2112	150	2	650	25,59	1800	5,91	3000	9,84	W 8/6	55	6+6	12600	27720
SH-150-600	10000	2640	150	2	650	25,59	1800	5,91	3000	9,84	W 8/6	75	6+6	12800	28160
SH-200-600	10000	2640	200	2	650	25,59	1800	5,91	4000	13,12	W 10/8	75	7+7	13700	30140
SH-160-750	12500	3300	160	2	800	31,50	1800	5,91	3000	9,84	W 10/8	90	6+6	14300	31460
SH-160-850	14000	3696	160	2	800	31,50	1800	5,91	3000	9,84	W 10/8	90	6+6	14500	31900
SH-200-750	12500	3300	200	2	800	31,50	1800	5,91	4000	13,12	W 10/8	90	7+7	16000	35200
SH-200-850	14000	3696	200	2	800	31,50	1800	5,91	4000	13,12	W 10/8	90	7+7	16300	35860

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.

COMPONENT	AGGRETEC AGT 50		AGGRETEC AGT 100		AGGRETEC AGT 150		AGGRETEC AGT 200		AGGRETEC AGT 250	
	MODEL	POWER	MODEL	POWER	MODEL	POWER	MODEL	POWER	MODEL	POWER
Hopper+grid+hydraulic unit	8 m³ capacity	4	8 m³ capacity	4	10 m³ capacity	4	10 m³ capacity	4	10 m³ capacity	4
Belt feeder	W650 L3900	4 + VFD	W800 L3900	4 + VFD	W1000 L3900	5.5 + VFD	W1000 L3900	7.5 + VFD	W1000 L3900	7.5 + VFD
Main conveyor belt	W650 L15000	4 x 2	W800 L15000	4 x 2	W1000 L18000	5.5 x 2	W1000 L18000	7.5 x 2	W1000 L21000	9 x 2
Inclined vibrating screen	W1200 L4000 3D	11	W1500 L4000 3D	11	W1500 L5000 3D	15	W1800 L5000 3D	18.5	W1800 L6000 3D	22
Dewatering screen	W1200 L2000 2C	4 x 2	W1200 L3000 2C	5.5 x 2	W1500 L3000 2C	6 x 2	W1800 L3000 2C	7 x 2	W1800 L4000 2C	7.5 x 2
Slurry centrifugal pump for sand 0/8	model 4/3 DAH	22 + VFD	4/3 DAH	30 + VFD	6/4 DAH	37 + VFD	8/6 DAH	45 + VFD	8/6 DAH	55 + VFD
Slurry centrifugal pump for sand 0/2	model 4/3 DAH	22 + VFD	4/3 DAH	30 + VFD	6/4 DAH	37 + VFD	8/6 DAH	45 + VFD	8/6 DAH	55 + VFD
Hydrocyclone for sand 0/8	D500		D600		D800		D800		D800	
Hydrocyclone for sand 0/2	D400		D500		D600		D600		D600	
Storage conveyor belts (n°5)	W500 L10000	3 x 5	W500 L10000	3 x 5	W650 L10000	4 x 5	W650 L10000	4 x 5	W650 L10000	4 x 5

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.

WASHING PLANTS



SCREENTEC

Screeotec is the machine that **washes and selects materials as gravel, coal, crushed stone slag, recycled materials, concrete, iron ore** and silica glass, with high efficiency.

The screen parts are **easy to mount and assemble** and make the Screeotec a suitable match for the other washing machines. You can install 2 or 3 decks and choose among several media options.

They mainly consist of a deck-holding body suspended on helical springs, a central protection guard for the shaft, a mesh tensioning system with a metal rod, a steel alloy shaft, grease lubricated bearings protected by a set of labyrinth flanges, adjustable eccentric weights for output variation, a rear feeding chute and hoppers bolted onto the front part of the machine for material discharge.



MODEL	Deck width		Deck length		Screening area		Deck Number	Capacity tph	Weight						Power		
	mm	feet	mm	ft	m ²	ft ²			Kg			Lbs					
VS-150-400	1500	4.92	4000	13.12	6.0	64.58	2 3 4	30-100	2500	3000	3500	5500	6600	7700	7.5	11	11
VS-150-500	1500	4.92	5000	16.40	7.5	80.73	2 3 4	50-200	5000	6000	6500	11000	13200	14300	15	15	18,5
VS-180-500	1800	5.91	5000	16.40	9.0	96.88	2 3 4	50-250	6000	7000	7500	13200	15400	16500	18,5	18,5	22
VS-180-600	1800	5.91	6000	19.68	10.8	116.25	2 3 4	50-280	6500	7500	8000	14300	16500	17600	18,5	18,5	22
VS-210-600	2100	6.89	6000	19.68	12.6	135.63	2 3 4	90-300	7000	8000	9000	15400	17600	19800	18,5	22	30
VS-210-700	2100	6.89	7000	22.97	14.7	158.23	2 3 4	90-300	7500	8500	10000	16500	18700	22000	22	30	37
VS-240-700	2400	7.87	7000	22.97	16.8	180.84	2 3	110-350	9000		9500	19800		20900		37	45
VS-240-800	2400	7.87	8000	26.25	19.2	206.67	2 3	130-400	15000		18000	33000		39600		45	55

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.

BUCTEC

The bucket wheels, sand recovery units, are used for the **recovery of sands** coming from aggregate washing plants. They are mainly composed of a slurry storage tank in steel inside which a wheel with buckets in perforated steel plates is fitted.

Thanks to its rotating motion, it can recover the sand, partially separating it from the water, and carry it through to the discharge outlet. The bucket wheel can have one or two Archimedean screws that carry the sands through to the centre of the storage tank. The transmission is by means of a reduction gear unit driven by an electric motor.



MODEL	Wheel diameter		Bucket width		Max capacity		Weight		Power KW
	mm	ft	mm	in	m ³ h	tph	Kg	Lbs	
BT-200-030	2000	6,56	500	19,69	20	30	1700	3740	2
BT-200-050	2000	6,56	750	29,53	30	50	2000	4400	3
BT-240-080	2400	7,87	1000	39,37	50	80	2700	5940	4
BT-240-110	2400	7,87	1300	51,18	70	110	3000	6600	5,5

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.



SCRUBTEC

C&D recycling is the application in which the Scrubtec finds its best application.

Low running and maintenance costs and the highly customizable features of this equipment can be listed among the most appreciated features of the Scrubtec. Its suitability for the C&D sector can be translated into high performances when it comes to scrubbing aggregates, lights and other floating materials.

Logwashers are used to wash very dirty materials. The material is washed through inclined blades arranged in series inside the machine. These blades slow down the advance of the material when it is very dirty, but facilitate progress when it is cleaner. **The whole washer is lined with interchangeable anti-wear steel armours.** The machine is driven by a motor reduction unit.



ATTRITEC

The Attritec is used to **remove effectively the pollutants on the surface of the sand** contained in the contaminated slurry by the action of scrubbing (friction). The friction is generated by agitators inside the machine.

The machine has two or more cells according for the contact times needed to achieve the optimal separation. Usually they are used before the hydrocyclone process.



MODEL LW	Blades diameter		Shaft length		Max feeding size		Capacity tph	Weight		Power KW
	mm	ft	mm	ft	mm	inch		Kg	Lb	
LW-080-500	800	2,62	5000	16,40	70	2,75	75	10500	23148	2x18.5
LW-095-600	950	3,11	6000	19,69	100	3,93	150	13500	29762	2x30
LW-095-700	950	3,11	7000	22,96	100	3,93	150	14500	31967	2x37
LW-120-600	1200	3,94	6000	19,69	100	3,93	220	16000	35273	2x45
LW-120-700	1200	3,94	7000	22,96	100	3,93	220	17500	38580	2x45

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.

	MODEL	VOL m ³	Power (kW)
2 CELLS	AT-0652	1,30	15X2
	AT-1302	2,60	22X2
4 CELLS	AT-0654	2,60	15X4
	AT-1304	5,2	22X4

* The data provided is indicative, the dimensions must be confirmed based on the granulometric curve of the material to be treated.

Where there is rock, there is Maxtec.



EXPLORE THE WORLD OF **CRUSHING**

MAXTEC is used in several sectors as mining, aggregate industries with tracked mobile crushing and screening equipment through integrated solutions to improve mobility, productivity, and safety. We work closely with our customers to provide top quality products and exceptional services to achieve their business requirements, as well as experienced engineers and genuine parts to keep **MAXTEC** products running for decades.

MAXTEC provides a full range of tracked mobile material processing equipment to the **aggregate, mining, industrial, demolition, construction waste** and **recycling** with jaw crushers, impact crushers, screeners, belt conveyors, tracked plants, as well as full scale material processing facilities.

MAXTEC CAT

MOBILE UNIT

JAW CRUSHER | SCREENING | SCALPER UNIT

The **Maxtec CAT** model is a compact jaw crusher with hydraulic adjustment for its granulometry output. Compact, fully remote controlled and easy to transport, allows a fast and simple set-up and working procedures by a single operator.

The **Maxtec CAT** is a high performance crushing machine, the best performing and reliable solution for construction companies and contractors who want to recycle their construction and demolition waste onsite.

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	DIMENSION (cm)	WEIGHT (Tonnes)
CAT 1910 JK	Jaw crusher	480X250	3.4t
CAT FS 1122	Screening unit	2800x1150	3.2 t
CAT SS1022	Scalper	2700x1150	12 t

JAW CRUSHER

SCREENING UNIT

SCALPER

COMPONENTS

- Feed hopper
- Screening unit | scalper
- Conveyor belt
- Extra reinforced body
- Motor
- Tracks

ACCESSORIES

- Magnet
- Dust suppression nozzles
- Top with 20 to 100 mm hole

MAXTEC TIGER

MOBILE UNIT WITH JAW CRUSHER

The **Maxtec** tracked jaw crushers are designed to meet the toughest demands of primary crushing applications in the demolition, recycling, quarrying and mining sectors.

The aggressive crushing action and design of jaw chamber perfected gives improved material low and high material reductions ratios when crushing even the hardest of materials with impressive power, reliability and proven performance.

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	DIMENSION (cm)	WEIGHT (Tonnes)
TIGER 500	Jaw crusher	500x350	7 t
TIGER 600	Jaw crusher	620x450	13 t
TIGER 800	Jaw crusher	800x500	18 t
TIGER 900	Jaw crusher	900x600	23 t
TIGER 1000	Jaw crusher	1100x600	28 t
TIGER 1060	Jaw crusher	1060x650	33 t
TIGER 1100	Jaw crusher	1100x780	38 t
TIGER 1200	Jaw crusher	1200X800	50 t

COMPONENTS

- Hoppers with wear-resistant inner coating
- Main belt tilting cylinder kit
- Double hydraulic circuit
- Additional emergency system
- Spraying system
- Electro-hydraulic hood opening
- Hydraulic main belt extension
- Radio control L1

ACCESSORIES

- Bi-directional hydraulic lifting magnet
- Hydraulically folding side conveyor belt
- Granulator kit for Tiger Moby
- Low-temperature kit - 30°
- L2 remote control
- Remote maintenance, remote diagnosis, monitoring and data storage

APPLICATIONS



aggregate



mining



C&D
waste



recycling



quarry



industrial



MAXTEC LION

MOBILE UNIT WITH **IMPACT CRUSHER - FIXED AND FREE HAMMER MILLS**

The Maxtec Impact Crushers are designed for crushing soft to medium natural granite and limestone and non-abrasive materials in the demolition, recycling, quarrying and mining industries, featuring extra thick heavy duty blow bars to offer a longer life, excellent reduction and high consistency of product shape.

COMPONENTS

- Hoppers with wear-resistant inner coating
- Main belt tilting cylinder kit
- Double hydraulic circuit
- Additional emergency system
- Spraying system
- Electro-hydraulic hood opening
- Hydraulic main belt extension
- Radio control L1

ACCESSORIES

- Bi-directional hydraulic lifting magnet
- Hydraulically folding side conveyor belt
- Transformer kit from Lion Master to Tiger Moby
- Low-temperature kit - 30°
- L2 radio control
- Remote maintenance, remote diagnosis, monitoring and data storage

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	DIMENSION (cm)	WEIGHT (Tonnes)
LION MASTER 600	impact crusher	600x400	14 t
LION MASTER 800	impact crusher	800x600	26 t
LION MASTER 1000	impact crusher	1030x650	31 t
LION MASTER 600 LION MASTER 600	impact crusher free impact crusher free	630x280 830x500	12 t 20 t
LION MASTER 800 LION MASTER 800	impact crusher free impact crusher free	1030x500 1230x500	20 t 21 t



MAXTEC LEOPARD

MOBILE FINISH **SCREENING UNIT**

This Maxtec tracked unit utilizes high efficiency inclined vibrating screen boxes; offering exceptional output capacity and accurate separation for process.

COMPONENTS

- Radio control L1

ACCESSORIES

- Tramoggia con griglia vibrante
- Tramoggia con griglia vibrante e ribaltabile
- Kit trasformer da 3 a 4 selezioni
- Kit lavaggio
- Tele manutenzione, tele diagnosi, monitoraggio ed archiviazione dati

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	DIMENSION (cm)	WEIGHT (Tonnes)
LEOPARD 34 T	Screening	3400x1000	3 t
LEOPARD 34	Screening	3400x1000	7 t
LEOPARD 40 T	Screening	4000x1400	6 t
LEOPARD 40	Screening	4000x1400	17 t
LEOPARD 50	Screening	5000x1400	20 t
LEOPARD 60	Screening	6000x1400	23 t



APPLICATIONS



aggregate



mining



C&D
waste



recycling



quarry



industrial

MAXTEC PUMA

MOBILE SCALPER SCREEN

This Maxtec tracked unit utilize scalper screen boxes; offering exceptional output capacity and an accurate separation for the process of the material.

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	DIMENSION (cm)	WEIGHT (Tonnes)
PUMA 1025 SSA	Scalper screen	1200X3000	15.6t
PUMA 1542 SSA	Scalper screen	1500X4000	27.5t
PUMA 1550 SSA	Scalper screen	1500x5000	35t

ACCESSORIES

- Radio remote control
- Band feeder
- Broadband magnet



MAXTEC PANTHER

MOBILE CONVEYORS


The Maxtec tracked conveyors are designed to minimize operating costs whilst maximizing stockpile capacity. A simple yet robust design allows an easy setup and its position in order to fulfil the customers' requirements.

MAXTEC MOBILE EQUIPMENT

MODEL	TYPE	Length (metres)
PANTHER 06036 CBA	Tracked conveyors	18.3 m
PANTHER 07542 CBA	Tracked conveyors	23 m

ACCESSORIES

- Radio control
- Magnet

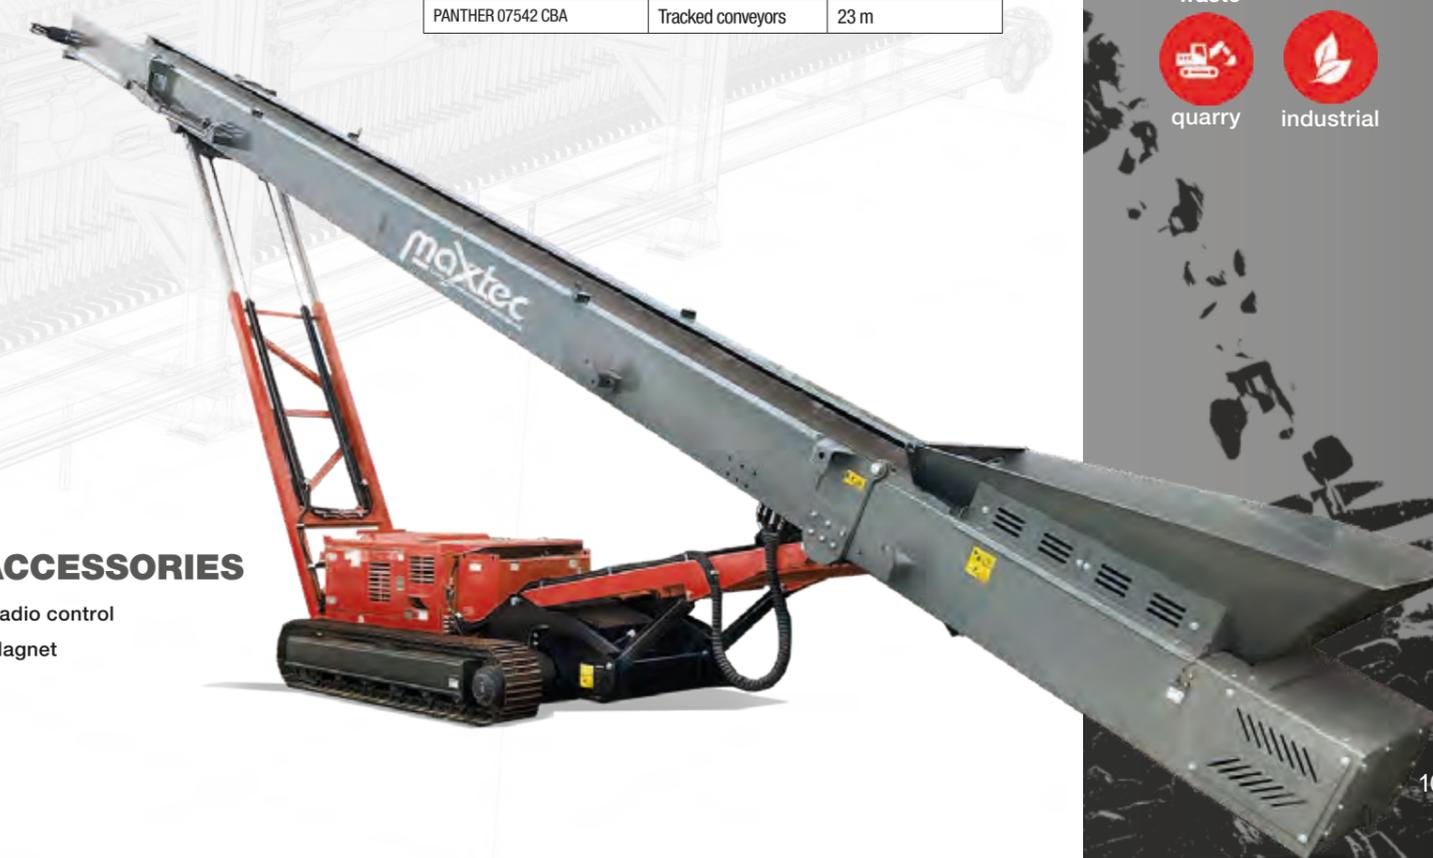

APPLICATIONS



aggregate



mining



C&D
waste



recycling




quarry



industrial

#Neverstop. We are in every part of the World

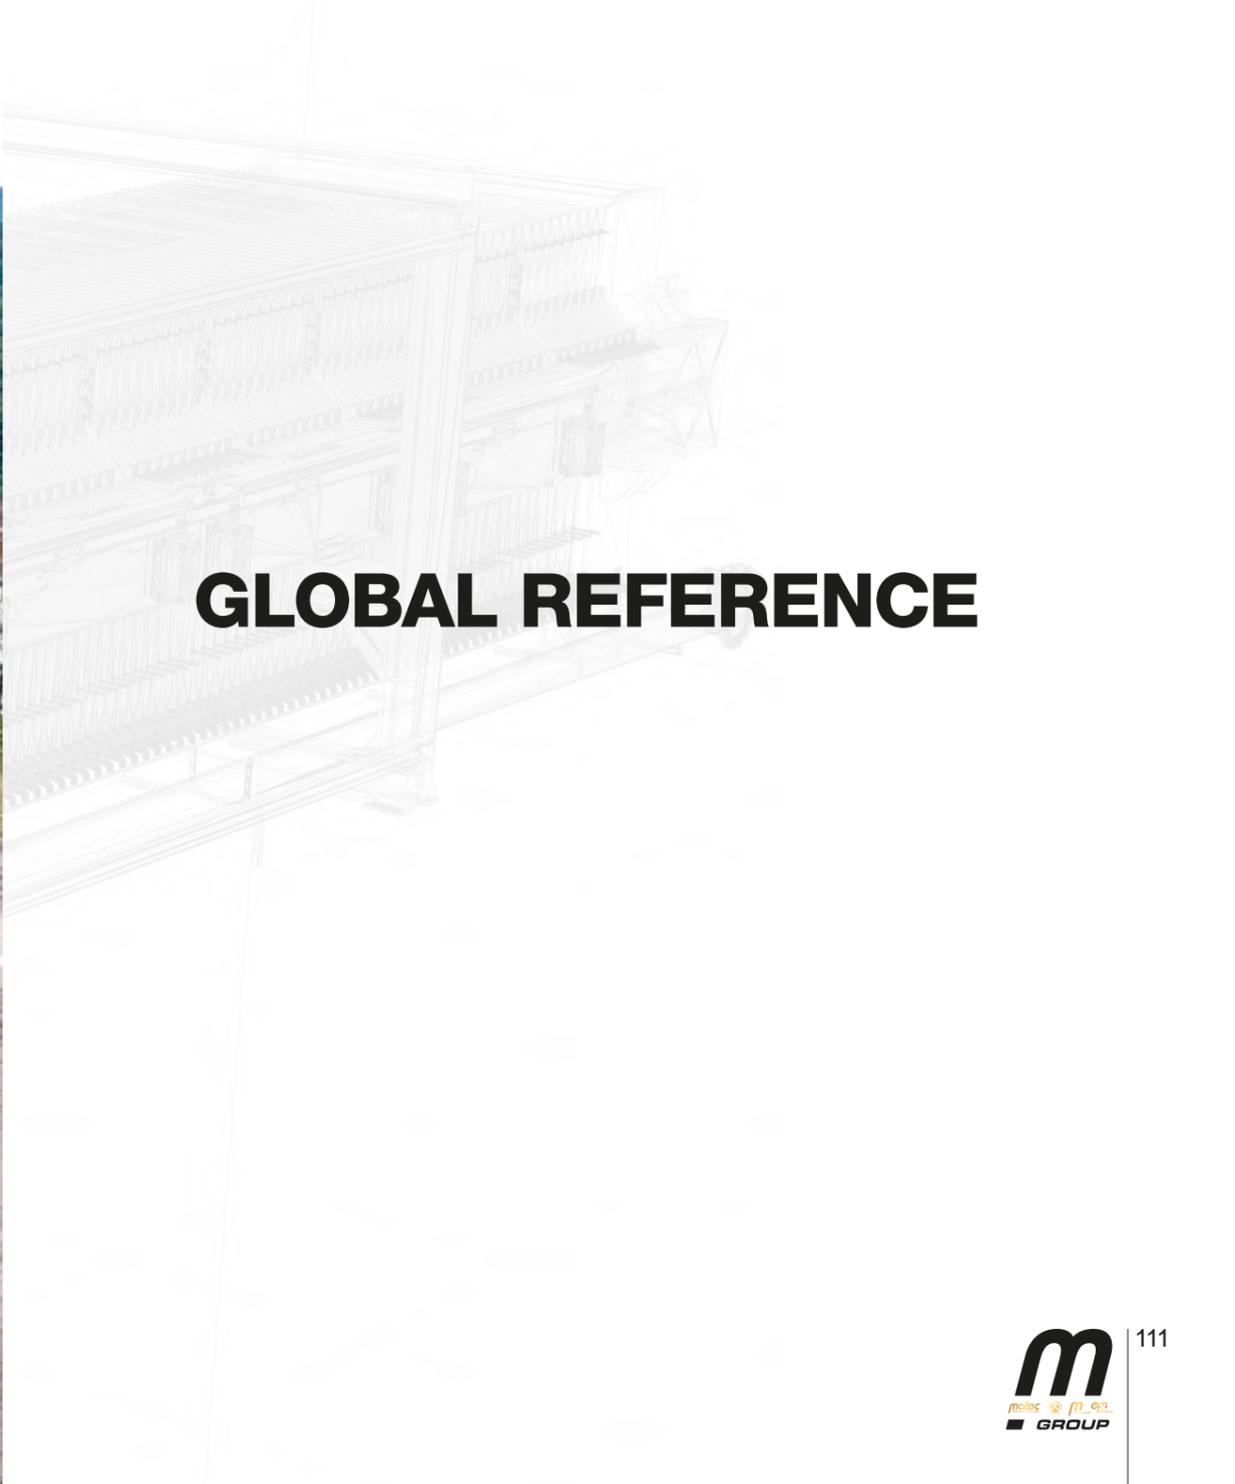

GLOBAL REFERENCE

CLIENT
KE LUNESS

Location
UK

FILTER PRESS
1500x2000 / 120P

TPH 30
LPM 22600
GPM 6000
CYCLES 2



CLIENT
FRAC SAND

Location
USA

FILTER PRESS
1500x1500 / 160P

TPH 20
LPM 20000
GPM 5400
CYCLES 2



CLIENT
JMOULD

Location
UK

FILTER PRESS
2000X2000 / 200P

TPH 50
LPM 12000
GPM 3000
CYCLES 1



CLIENT
CSN 1°

Location
BRAZIL

FILTER PRESS
2000X2000 / 190PX4

TPH 550
LPM 20000
GPM 5400
CYCLES 3



CLIENT
CSN 2°

Location
BRAZIL

FILTER PRESS
2000X2000 / 200P

TPH 50
LPM 12000
GPM 3000
CYCLES 1



CLIENT
FORTUM

Location
SWEDEN

AGGRETEC 50 S
FILTER PRESS
1200X1200 / 100P



CLIENT
AAL
Location
UK

AGGRETEC 150

FILTER PRESS
1500X1500 / 170P



CLIENT
RENEWI
Location
BELGIUM

AGGRETEC 150

FILTER PRESS
1300X1300 / 80P



CLIENT
ALMINA

Location
PORTUGAL

DECANTER
PASTE
Ø 22 mt



CLIENT
RMR
RECYCLING LTD

Location
UK

AGGRETEC
AGT-150

2 X FILTER PRESS
1300X1300 / 100P




CLIENT
**STUART
PARTNERS LTD**

Location
UK

AGGRETEC 150

**FILTER PRESS
1500X1500 170P**

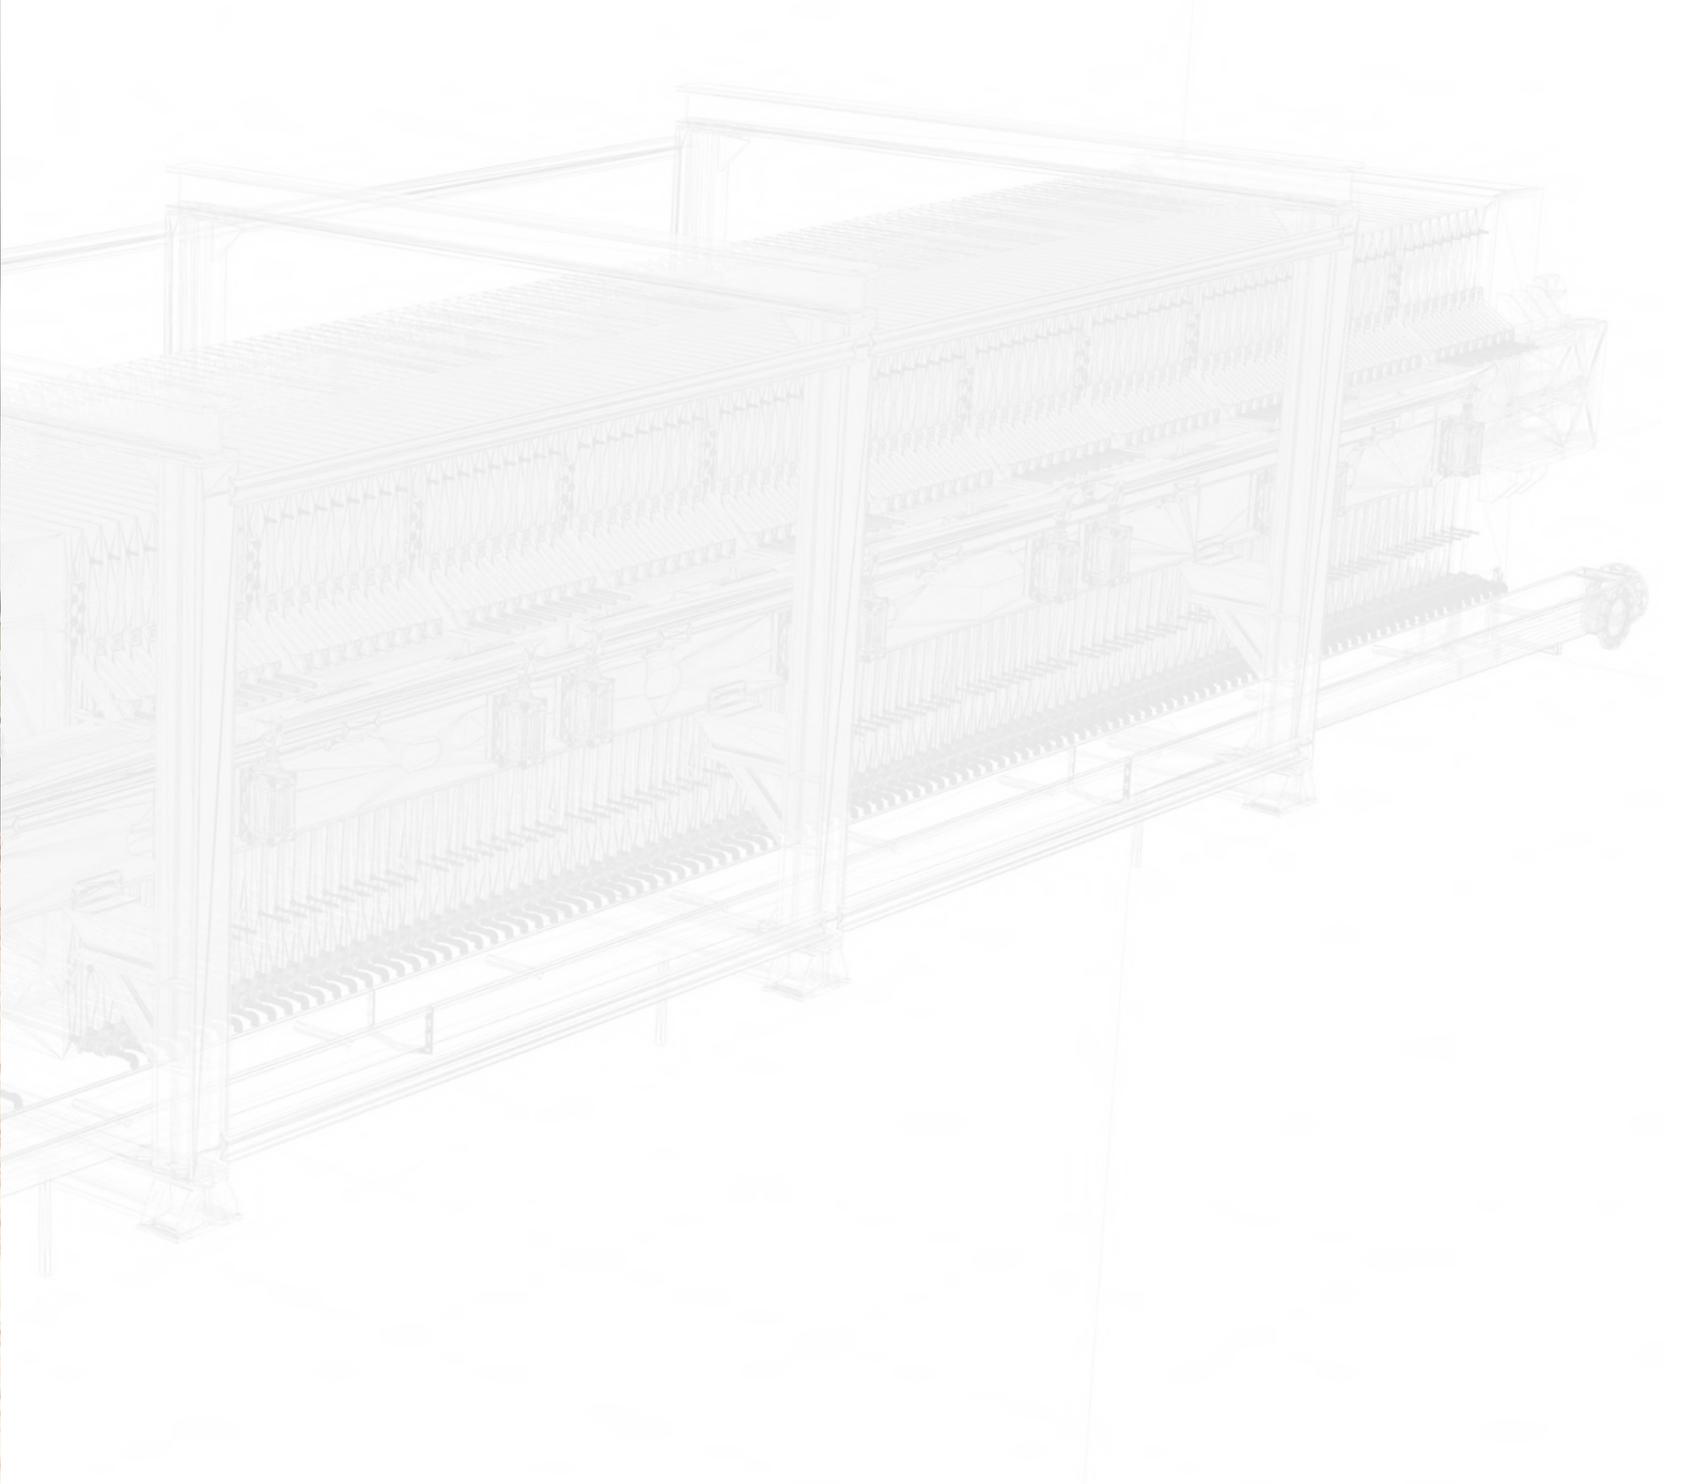



Via Aurelia Ovest, 383 - 54100 Massa (MS) Italy
tel. +39.0585.8365
matec@matecindustries.com
www.matecindustries.com

